

- Wire into your automatic gate/door control board
- Simple exit system to open (set board on auto close)
- Exit without having to use a remote or push button

- Works with ALL operators
- Conduit-ready housing
- Low standby current (30-70µA)

**Hidden Underground!**

**5 YEAR WARRANTY**



Bury 'Puck' 100mm beside driveway

Part: 1018-0126

### FEATURES

- When buried, the 'Puck' is hidden and vandal proof
- Covers 3m (Max.) wide driveways
- 3 Sensitivity settings
- Wire directly into motor control board
- Works with any and all gate operators
- Super low current draw, great for solar applications!

### QUICK REVIEW

- Global Access Puck vehicle detectors are fully enclosed units
- All the electronics are sealed in the sensor probe housing
- There is no external output board to install
- Connect up directly to the auxiliary power and exit terminals on the gate operator... easy!

### IMPORTANT NOTES

- Warranty voided if cable is not run in conduit!
- Detector 'Puck' is to be buried 75mm - 125mm below surface
- Gate logic needs to be set to auto-close
- Use of safety beams strongly recommended

### OTHER TRIGGER DEVICES



Wireless push button



Wireless Safety Beams, have NO relay



4G Trigger Module



Backlit Keypad




Bluetooth Digital Timer



Loop Detector


### Standard Application Example

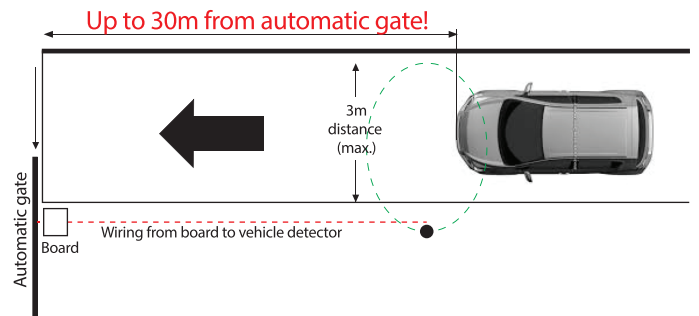

### Technical Specifications

Power Supply	12-24v AC/DC
Stand-by Current	30-70 Microamps (µA)
Alarm Current	40-60 Milliamps (mA)
Relay Contact Rating	1 Amp/24v DC (1mA at 5VDC min. load)
Relay Time	2-3 Seconds
Temperature Range	-32° C - 60° C
Dimensions	114.3 mm Ø x 88.9 mm High

### STANDARD WIRING



### 3 WIRE SOLUTION

