

**SCHEDA PRODOTTO
TECHNICAL DATA**


Ruota con supporto esterno - 1 cuscinetto

Art. 386 / 385 / 385P / 385L

Roues avec support extérieur - 1 roulement à billes
Wheels with external support - 1 ball bearing
Poleas con soporte superior - 1 rodamiento de bolas



**CERTIFICATE
EN ISO 9001:2008**

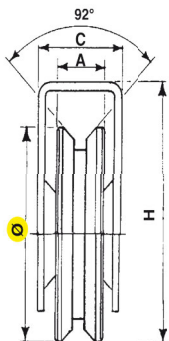


MATERIALE/MATERIAL : C40
CUSCINETTO/BALL BEARING: 2 parapolvere 2RS/
with dust protection on both sides 2RS
FINITURA/FINISHING: Zinc.Galv. 8÷10µm

art.386i, 385i in acciaio inox AISI 304, acier inox AISI 304
stainless steel AISI 304, acero inox AISI 304

Ø mm	70	80	90	100
A mm	20	20	20	20
C mm	24	33	33	33
H mm	77	95	100	105
Portata 2 ruote Force 2 roues Capacity 2 wheels Capacidad 2 poleas	200	300	300	350

RESISTENCE TEST Kg/sec

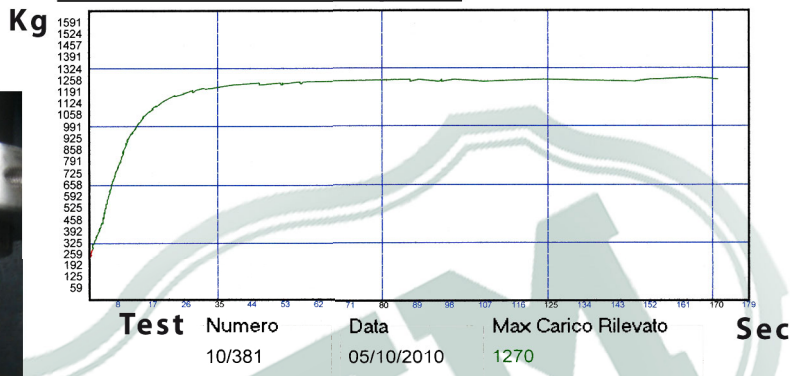

The products I.B.F.M. are tested to produce gates satisfying the norm **UNI EN 13241-1** to obtain the CE certification of them. The products I.B.F.M. fulfils the requirements of Annex VII of directive **2006/42/CE** (Machine directive, for partly completed machinery)

The carrying capacity and durability have been calculated on products mounted and welded correctly, regularly and periodically lubricated and maintained in relation with the use, the position and the environmental conditions.