



Commercial grade, high quality components for residential or commercial applications



Configure, monitor, update and diagnose your charger via Bluetooth™ using the VictronConnect Smartphone App





7 Stage intelligent charging for increased battery life



Low-Voltage Disconnect function protects batteries from full discharge



Extended run times with selected batteries up to 40Ah

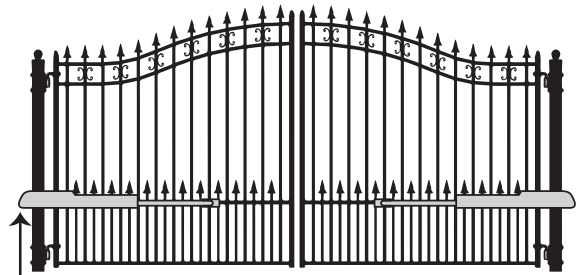

UPS MODELS	BATTERY FITTED	POWER FEED	POWER OUTPUT	ENCLOSURE MATERIAL	ENCLOSURE DIMENSIONS (MILLIMETERS)	TOTAL KIT WEIGHT	PART NO.
12V - 25Ah	1 x 25Ah	230v	+/- 12v	ABS Plastic	380 H x 280 W x 180 D	10Kg	1074-0009
24V - 7Ah	2 x 7Ah	230v	+/- 24v	ABS Plastic	380 H x 280 W x 180 D	12Kg	1074-0013
24V - 25Ah	2 x 25Ah	230v	+/- 24v	ABS Plastic	380 H x 280 W x 180 D	17Kg	1074-0010
24V - 40Ah	2 x 40Ah	230v	+/- 24v	Painted Metal	400 H x 400 W x 200 D	37Kg	1074-0011

- Manufacturers – Importers – Distributors
- Gate & Door Automation
- Barriers & Parking Equipment
- Solar kits
- Hardware & Accessories
- Automatic Doors and Entrances