


240V & 24V Electro Mechanical Sliding Gate Motor

GENIUS

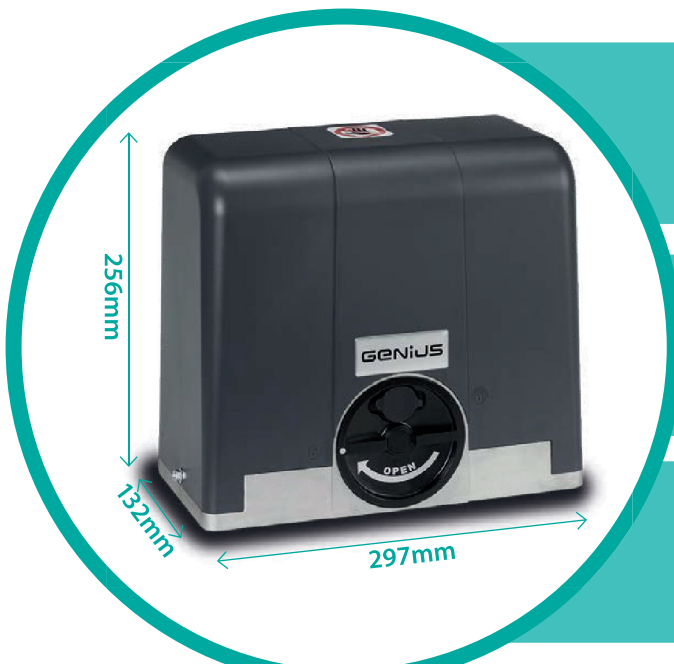


Die- cast aluminum chassis and protective robust ABS housing.

Electronic encoder integrated for automatic reversal on contact.

Easy lever operated manual release mechanism (Key lock optional)

- Capacity = 500kg Max. (240V)
- Speed 200mm per second
- 50,000 Cycles (Life Expectancy)
- Easy installation
- Complete with magnetic limit stops

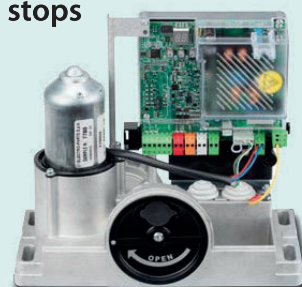

Ready to go straight out of the box:

- 2x pre-coded hand transmitters
- 1x receiver plugged in
- Safety links connected
- Cable gland provided
- Mains cable included

THE MODEL RANGE

BLIZZARD 230V



MAX
500kg

MAX
200mm
per sec

230v

BLIZZARD 24V



MAX
400kg


MAX
200mm
per sec

24vdc



170mm
(with pinion)

- **Ultra-Narrow, modern aesthetics**
- **Large selection of adjustable parameters**



Genius are part
of the FAAC Group

FAAC
Simply automatic.

POPULAR ACCESSORIES



A wide range of rack types are available



90mm frame insert gate wheel



Ground Track



90 degree 5mm bracket for rollers to support sliding gate



40mm rollers: Available in 60, 100 & 150mm



Bolt down gate stop including rubber



4G Trigger Module



Professional 230V UPS



24/7 & 365 Day Timers



Access Control Stand & Backlit Keypad



Safety Beams