

Hardwired Vehicle Detector "Puck"



Easy Exit Device



Wire into your automatic gate/door control board



Simple exit system to open (Set board on auto close)



Exit without having to use a remote or push button



Works with all operators



Conduit-ready housing



Covers 3m (Max.) driveways




Low standby current, great for Solar applications



The use of safety devices is strongly advised

ARMAS Compact Photo Beams
Wireless/Wired
Plastic or Metal Anti Vandal
#1059-0050

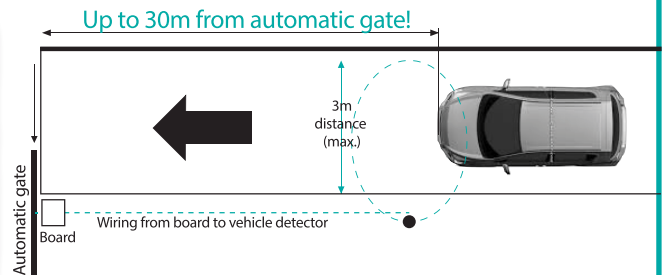

All the electronics are sealed in the sensor probe housing

Power Supply	Stand-by Current	Alarm Current	Relay Contact Rating	Relay Time	Temperature Range	Dimension	Part Number
12-24v AC/DC	30-70 Microamps	40-60 Milliamps	1 Amp/24v DC (1mA at 5 VDC min. load)	1-3 Seconds	-32° C - 60° C	114.3mm Ø x 88.9mm High	1018-0126

Standard Application Example

Hidden Underground



ON AN OBJECT



IN THE GROUND



IN THE DRIVEWAY



1300 366 046

sales@global-access.com.au

For more information, visit our website!

global-access.com.au

