

The SP900 motor is integrated into the post, making the motor invisible, giving an uncluttered appearance



During a power failure, the operator can be run in emergency mode via the optional battery backup kit



The operator learns on its own and always runs at the same speed thanks to the DPS (Dynamic Power System)



Simple and fast Plug n' Go installation, with numerous accessory possibilities such as photo cells and induction loops




The integrated electric lock offers self-locking and break-in protection should there be an attempt to slide the operator

MODELS	MOTOR-POWER SUPPLY	MAX. GATE WEIGHT	MAX. GATE WIDTH	MAX SPEED	DUTY CYCLE	PINION	PINION HEIGHT	PART NO.
SP900 [un-assembled kit, 2.1m raw]	24V	400 kg	8m	17.1m/min 285m/sec	40%	Z18	Adj. 100-300mm	1516-0034
SP900 [pre-assembled kit, 2.1m raw]	24V	400 kg	8m	17.1m/min 285m/sec	40%	Z18	Adj. 100-300mm	1516-0023

OPTIONAL ACCESSORIES TO ENHANCE YOUR SP900

Backup Battery	Offers emergency egress	5106-0020
Levelling Plate Set	Level the motor post when the ground is not quite level	1512-0003

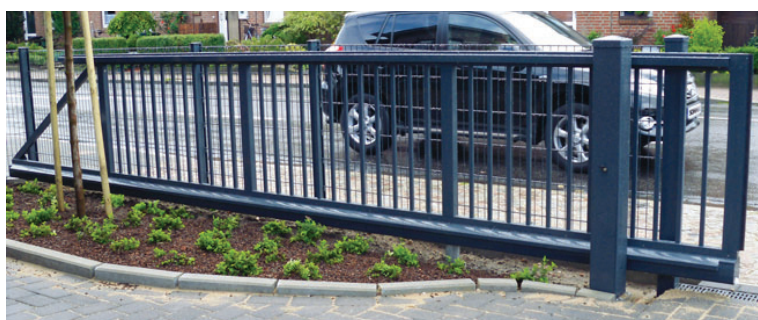

Please contact us and we will be happy to assist you and discuss your application

1300 366 046 global-access.com.au