


230V COMMERCIAL SLIDING GATE MOTOR FOR GATES UP TO 2000Kg



Designed and built for commercial use. Programmable and service friendly with a range of setting options

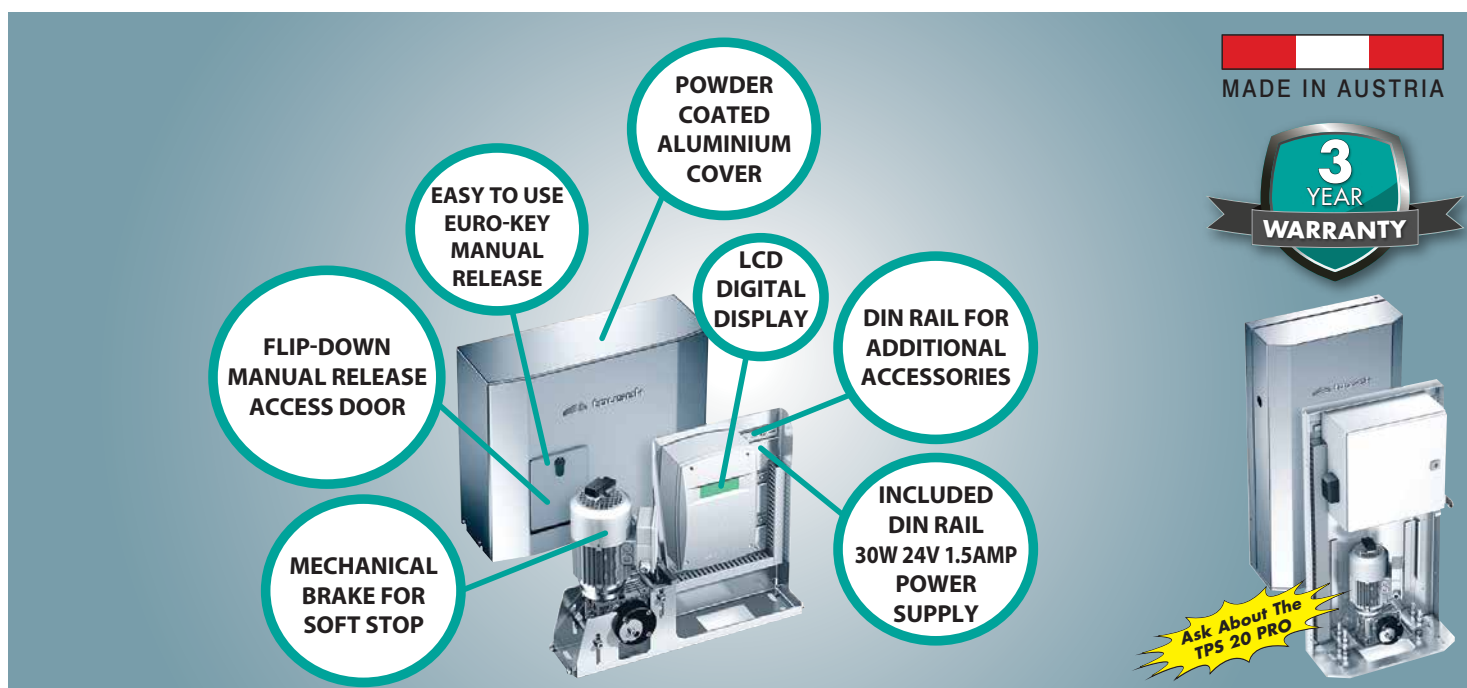

The 230V motor offers peace of mind as it is designed and built for durable, efficient operation in high-use applications



Intelligent soft start and soft stop ensures smooth gate operation in both directions



Automatic opening when contact is made with an obstacle, ensuring the vehicle is not trapped



Made for demanding applications with permanent, active force control with boost function for worry-free operation

TPS 20 MODELS	DIMENSIONS	MOTOR-POWER SUPPLY	MAX. GATE WEIGHT	MAX. SPEED	DUTY CYCLE	TOOTH GEAR	PART NO.
TPS 20 - Z15	616 x 532 x 211 mm	230V	2,000Kg	14m/min. 233mm/sec	80%	Z15 Module 4	1516-0037
TPS 20 - Z20			1,200Kg	18m/min. 300mm/sec		Z20 Module 4	UPGRADE YOUR PINION SIZE 6049-0553
TPS 20 - Z24			800Kg	22m/min. 360mm/sec		Z24 Module 4	6049-0554
TPS 20 - Z28			500Kg	25m/min. 420mm/sec		Z28 Module 4	6049-0555

OPTIONAL ACCESSORIES TO ENHANCE YOUR TPS AUTOMATION

Courtyard Lamp/Control Lamp Module ®	For 230V lamp connection, Max. 100W	1044-0014
External Gate Status Module ®	Potential free signal contacts, Max. 24V, 10W	1018-0087



Indication of the max. gate weight is for non-ascending (incline), wind-permeable gates!
® Only one (1) of the optional modules can be fitted to the control board



Please contact us and we will be happy to assist you and discuss your application

1300 366 046 global-access.com.au