

TWIST 200E - For gates up to 2.5m* (2 Wire)
TWIST 200EL (Long) - For gates up to 3m* (2 Wire)



PREMIUM QUALITY



MADE IN GERMANY

The Sommer range of Twist linear swing gate motors represent German engineering and manufacturing at its finest!


World renowned for their durability and strength, the Sommer Twist range are market leaders when it comes to their strength capabilities.

KEY FEATURES:

- No loss of power on ramp-up or down
- Easy to access/use manual release
- Easy to install, gate and post bracket can be screwed or welded as required
- Optional external transformer available for all models
- OPTIONAL Backup Battery Solutions are available via use of a dedicated 24V UPS
- OPTIONAL Solar Solution available
- Simple to setup!

IMPORTANT NOTES:

- Requires stops in the OPEN + CLOSED positions

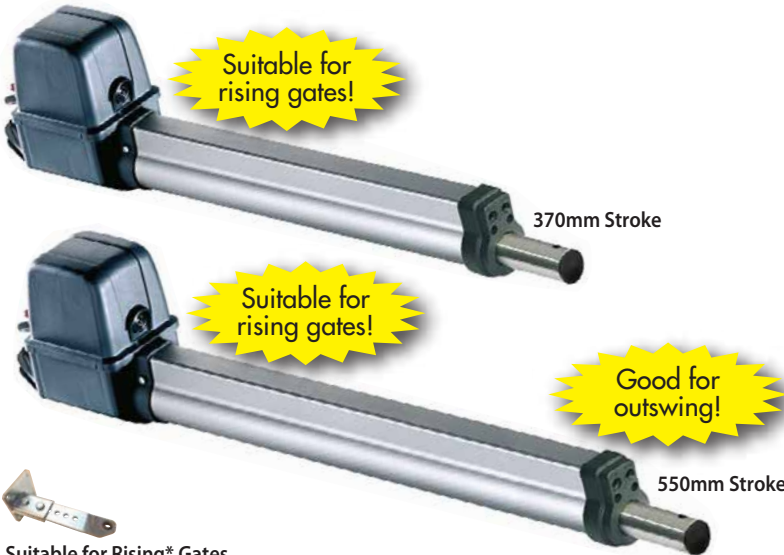

Suitable for Rising* Gates
 [*Max. 100Kg @ 2m Opening on a 10% incline]
 (*Requires optional rising gate bracket; Left: 5812-0003 Right: 5812-0004)

CONTROL BOX



OPTIONAL
 Terminal programming device. Provides additional programming features



MODEL	MOTOR VOLTAGE	MAXIMUM GATE WEIGHT (PER LEAF)	MAX. STROKE	MIN. SIDE ROOM	MAX. ANGLE	FORCE (NM)	DUTY CYCLE	SINGLE KIT PART NO.	DOUBLE KIT PART NO.
TWIST 200E	24V	250Kg @ 2m	370mm	110mm	120°	2,000	15%	1656-0050	1656-0051
TWIST 200E (Sep. Trans)	24V	250Kg @ 2m	370mm	110mm	120°	2,000	15%	1656-0056	1656-0057
TWIST 200EL	24V	150Kg @ 3m • 250 @ 2m	550mm	110mm	130°	2,000	15%	1656-0052	1656-0053
TWIST 200EL (Sep. Trans)	24V	150Kg @ 3m • 250 @ 2m	550mm	110mm	130°	2,000	15%	1656-0058	1656-0059

OPTIONAL ACCESSORIES TO ENHANCE YOUR TWIST XL

		50mm H	100mm H
Rear Mounting Brackets	Choose 50mm OR 100mm - Suits the Twist range - 200 350 XL	5825-0019	5825-0020
TorMinal Programming Device	For programming additional functions - Suits the Twist range - 200 350 XL		1018-0096



Indication of the max. gate width is for wind-permeable gates and for non-ascending (incline) gates!
 The Twist 200 range is not suitable for solar applications. No battery backup solution is available for the Twist 200 range.
 We always recommend a lock be fitted for gate leaves over 3m in length.

POPULAR ACCESSORIES

External Transformer	Safety Beams to allow auto-close	24V UPS	Electric solenoid lock c/w latch plate	Maglock	Electric Drop Bolt	Backlit Keypad with fob reader capabilities

Please contact us and we will be happy to assist you and discuss your application

1300 366 046 global-access.com.au