



GATE AUTOMATION, HARDWARE & ACCESSORIES

2022 QUICK REFERENCE GUIDE



June 2022 Edition 14

FEATURE PRODUCTS




dictator

RADIAL DAMPER / INCLINE BRAKE FOR SLIDING GATES

Used for continuous damping (speed control) of sliding gates on an incline, even when there is no power available as it is a mechanical device.

For safety reasons a radial damper should be fitted on all gates on an incline to control the closing speed over in the event of power failure.

- Operates in a 'free-wheel, dampening' function depending on gate direction
- Rust resistant, sealed against dust and water
- Adjustable pressure to control downhill gate speed

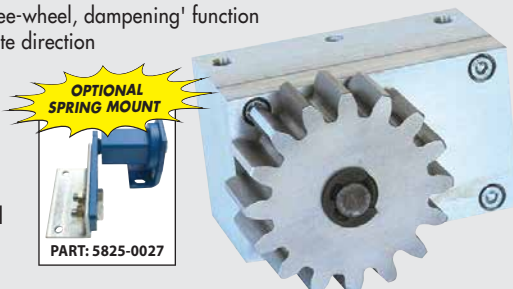

PART:
Z16 Mod 4
(600Kg Max. @ 4% Incline) 1018-0069
(1,200Kg Max. @ 2% Incline) 1018-0071

Z12 Mod 6
(600Kg Max. @ 4% Incline) 1018-0070
(1,200Kg Max. @ 2% Incline) 1018-0072

GATE AND SWING-DOOR CLOSERS

- Help to force the leaf into the closed position reliably and securely!
- For leaves up to 1.5m width and/or Max. 100Kg in weight
- Optional mount bracket for ascending / incline hinged gate and door leaves
- Adjustable closing speeds



- PART:**
- 400N - 150mm Stroke, for leaves up to 80Kg or 1.2m wide; (Dark Grey) 1018-0127 (White) 1018-0053
 - 400N - 200mm Stroke, for leaves up to 80Kg or 1.5m wide; (Black) 1018-0135 (Grey) 1018-0055
 - 600N - 200mm Stroke, for leaves up to 100Kg or 1.5m wide; (Grey) 1018-0149
 - Mount bracket for ascending / incline hinged leaves; 1018-0137

BLIZZARD

- Speed 200mm per second
- 50,000 Cycles (Life Expectancy)
- Magnetic limit stops



PART:
(24V) 1555-0013 | (230V) 1555-0002
(24V BACKUP BATTERY) 6049-0373

PULL TSA

- Oil bath gearbox
- Machine cut, hardened steel gears
- ARS (Automatic Reversal System) for maximum safety
- Encoder (No limit switch)
- Requires physical stops



PART:
(Z24) 1555-0018



740

- Anti-crushing protection when fitted with an encoder (Advanced version only)
- Advanced 740D Control Board
- Magnetic limit stops



PART:
(NO ENCODER) 1555-0001
(WITH ENCODER) 1556-0001

PULL T4 SPEED

- Oil bath gearbox
- Machine cut, hardened steel gears
- No limit switches
- Adjustable height base plate
- Illuminated LC Display
- High Speed, High Power



PART:
(700Kg @ 292mm/s - Z16) 1555-0020
(600Kg @ 366mm/s - Z20) 1555-0034
(400Kg @ 400mm/s - Z24) 1555-0035



C720

- Adjustable Open and Closing speed
- Virtual Encoder for automatic obstacle reversal
- Magnetic limit stops
- 123mm pinion height



PART:
1555-0004 | (EXT. TRANS) 1555-0003
(BACKUP BATTERY) 6049-0373

C721

- The powerful big-brother of the popular FAAC C720
- Capable of continuous use
- New reduction principle with mobile axis (FAAC patent)



PART:
1555-0005 | (EXT. TRANS) 1555-0006
(BACKUP BATTERY) 6049-0373

PULL T24 SERIES

- Built for durability
- Oil bath gearbox
- Machine cut, hardened steel gears
- Self learning limits with automatic reversal system
- Adjustable base plate (included)
- Large illuminated LC Display
- Ground stops are required



Super Solar Friendly!

OPTIONAL RADIO PACKAGE

OPTIONAL BACKUP BATTERY



PART:
(700Kg @ 216mm/s - Z16) 1556-0020 | (700Kg @ 216mm/s - Z16 EXT. TRANS - Z16) 1556-0021
(600Kg @ 270mm/s - Z20) 1556-0008 | (600Kg @ 270mm/s - Z20 EXT. TRANS - Z20) 1556-0022
(400Kg @ 325mm/s - Z24) 1556-0009 | (400Kg @ 325mm/s - Z24 EXT. TRANS - Z24) 1556-0019

PULL T8, T10 + T15



- Oil bath gearbox
- Machine cut hardened steel gears
- Self learning limit detection
- Automatic reversal system
- Premium construction, built for durability
- Large illuminated LC Display
- No loss of force at reduced rotation speeds

- Modern sleek styling
- Adjustable soft stops
- Accessory voltage 12VDC 200mAh
- Adjustable base plate (included)
- Ground stops are required



PART: PULL T8
(600Kg @ 216mm/s - Z24) 1555-0021



PART: PULL T10
(800Kg @ 216mm/s - Z24) 1556-0016



PART: PULL T15
(1500Kg @ 150mm/s - Z16) 1556-0027
(1200Kg @ 183mm/s - Z20) 1556-0018
(1000Kg @ 216mm/s - Z24) 1556-0023

OPTIONAL RADIO PACKAGE



PART: 1018-0133

Belt Drive Option For T15

Master + Slave Options

Slight Incline Capable



SP900 OPERATOR IN SUPPORT POST

- The SP900 24V electric motor is integrated into the post, making the motor invisible, giving an uncluttered appearance with magnetic limits
- Motor hidden in Aluminium support post; 2100x150x150mm
- Fantastic for added security!
- Adjustable pinion height up to 40mm
- Note: Gate rack sold separately



OPTIONAL BACKUP BATTERY

PART: 5106-0024



PART: (Unassembled Kit) 1516-0034



Encoder for precision



Display the last 800 events



Oil bath, hardened steel gears

COMMERCIAL SLIDING GATE MOTORS [NO RADIO GEAR INCLUDED]



746

- Anti-crushing safety
- Twin-disk oil-bath clutch
- Electric encoder
- Non-reversing motor



OPTIONAL SLH RECEIVER CARD



PART: 6049-0336

OPTIONAL SLH XT2 REMOTE



PART: 6049-0328



PART: (600Kg @ 160mm/s - Z16) 1516-0001 | (400Kg @ 200mm/s - Z20) 1516-0002

844

- Magnetic Stops
- Anti-crushing safety
- Designed for intensive use, rated at 1-Million cycles!

844 Chain Drive Available



OPTIONAL SLH RECEIVER CARD



PART: 6049-0336

OPTIONAL SLH XT2 REMOTE



PART: 6049-0328



PART: (1800Kg @ 160mm/s - Z16) 1516-0003 | (1000Kg @ 200mm/s - Z20) 1516-0006
(Chain Z16) 1516-0004 | (Chain Z20) 1516-0005

PHOENIX 22 PLUS

- CONTINUOUS USE!
- Powerful Intelligent Inverter
- Super reliable motor!
- Plugs into a GPO
- Limit switches



HAS A METAL CASE

OPTIONAL RADIO PACKAGE



PART: 1018-0134



PART: 1516-0013

TPS 20

The ultimate in premium European designed and manufactured automation.

- Distance measurement via absolute encoders
- Large illuminated LC-Display
- Clear text menu programmable via four buttons
- Adjustable soft stop
- Automatic reversal system
- Permanent self-regulating force with boost function
- Electronic monitoring of emergency release
- Input for gate back area surveillance
- Status display for safety and buttons/switches inputs
- Mechanical brake for safe gate stop
- 1.5 amp accessory power supply



Strong + Fast!

OPTIONAL 2-BUTTON REMOTE



PART: 1018-0118

OPTIONAL ADD-ON RECEIVER



PART: 1018-0121



OPTIONAL RADIO PACKAGE



PART: 1018-0133

[Z15 PINION]



PART: 1516-0037

[Z20 PINION]



PART: 1516-0037 + 6049-0553

[Z24 PINION]



PART: 1516-0037 + 6049-0554

[Z28 PINION]



PART: 1516-0037 + 6049-0555

TPS 20 PRO, 40 PRO + 60 PRO

The ultimate commercial sliding gate motors!



Powerful Solutions!

- Large illuminated LC-Display
- Integrated control board
- Operation mode selectable (Impulse, Auto)
- Adjustable Soft Stop for Open/Close Functions
- Mechanical brake for safe stop
- DIN Rail for additional accessories
- Adjustable speed
- Status display for safety and impulse connections
- Electronic monitoring for manual release
- 1.5Amp accessory power supply

OPTIONAL RADIO PACKAGE



PART: 1018-0133

OPTIONAL 2-BUTTON REMOTE



PART: 1018-0118

[TPS 20 PRO]



PART: 1516-0039

[TPS 40 PRO]



PART: 1516-0040

[TPS 60 PRO]



PART: SPECIAL ORDER ONLY

RADIAL DAMPER / INCLINE BRAKE FOR SLIDING GATES



Used for continuous damping (speed control) of sliding gates on an incline, even when there is no power available as it is a mechanical device.

These radial dampers have been designed for use with sliding gates fitted with an electric gate motor. For safety reasons a radial damper should be fitted on all gates on an incline to control the closing speed over in the event of power failure.

- Operates in a 'free-wheel, dampening' function depending on gate direction
- Rust resistant, sealed against dust and water ingress for outdoor use
- Adjustable pressure to control downhill gate speed

OPTIONAL SPRING MOUNT



PART: 5825-0027

OPTIONAL MOUNT BRACKET



PART: 1365-0009



EXAMPLE VIDEO



PART: Z16 Mod 4 (600Kg Max. @ 4% Incline) 1018-0069 | Z12 Mod 6 (600Kg Max. @ 4% Incline) 1018-0070 | (1,200Kg Max. @ 2% Incline) 1018-0071 | (1,200Kg Max. @ 2% Incline) 1018-0072

Please contact us and we will be happy to assist you and discuss your application

1300 366 046 global-access.com.au

RESIDENTIAL SWING GATE MOTORS - ARTICULATED



391 [STD + ADV] - STD Max. 80Kg @ 1.8m

- Integrated control board
- Inbuilt mechanical stops
- Auto learning, anti-crushing
- Low side room kit (LSK) available



Only 2 Motor Wires!



PART:
 (STD Single Kit) 1655-0008
 (STD Single + Ext. Trans) 1655-0009
 (STD Double Kit) 1655-0005
 (STD Double + Ext. Trans) 1655-0006
 (ADV Single Kit) 1655-0010
 (ADV Double Kit) 1655-0007
 (STD BACKUP BATTERY) 6049-0373
 (ADV BACKUP BATTERY) 5106-0011
 (BUS INTERFACE) 1059-0010



TWIST AM - Max. 250Kg @ 2.5m

- Innovative control unit that constantly adjusts the force to operate the gate
- Additional advanced programmed functions are available via optional SOMLink device
- Compact, quiet and strong
- Inbuilt mechanical stops
- High quality



5 Wire Motor!



PART:
 (Single Kit) 1655-0072
 (Single + Ext. Trans) 1655-0078
 (Double Kit) 1655-0073
 (Double + Ext. Trans) 1655-0079
 (BACKUP BATTERY) 5106-0020
 (SOMLink INTERFACE) 1879-0002



TRIGON - Max. 220Kg @ 2m

- No welding required
- Easy to Install
- Virtual encoder
- Ideal for large pillars



Only 2 Motor Wires!



PART:
 (Single Kit) 1655-0030
 (Single + Ext. Trans) 1655-0041
 (Double Kit) 1655-0029
 (Double + Ext. Trans) 1655-0042
 (BACKUP BATTERY) 6049-0373
 (BUS INTERFACE) 1059-0010



390 [STD + ADV] - ADV Max. 220Kg @ 2m

- No welding required
- Ideal for large pillars
- Standard (E024S) or Advanced (E124) control board options
- Limit switch option



Only 2 Motor Wires!



PART:
 (STD Single Kit) 1655-0003
 (STD Single + Ext. Trans) 1655-0031
 (STD Double Kit) 1655-0002
 (STD Double + Ext. Trans) 1655-0033
 (ADV Single Kit) 1655-0004
 (ADV Double + Ext. Trans) 1655-0032
 (ADV Double Kit) 1655-0001
 (ADV Double + Ext. Trans) 1656-0001
 (STD BACKUP BATTERY) 6049-0373
 (ADV BACKUP BATTERY) 5106-0011
 (BUS INTERFACE) 1059-0010




RESIDENTIAL SWING GATE MOTORS - LINEAR



SONIC 24 RAPID - Max. 250Kg @ 2m

- Hi Speed
- Simple Installation and Setup
- Self-locking steel spindle, encapsulated gear
- Powerful Premium Austrian Quality
- Inbuilt mechanical stops

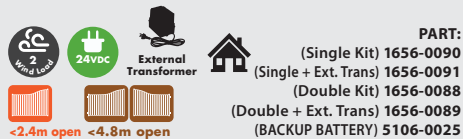


PART:
 (Single Kit) 1656-0090
 (Single + Ext. Trans) 1656-0091
 (Double Kit) 1656-0088
 (Double + Ext. Trans) 1656-0089
 (BACKUP BATTERY) 5106-0025

SLIM CLR - Max. 150Kg @ 2.2m

- Very slim and discreet design with adjustable stop and start
- Inbuilt limit switches for both the open & closed positions




Smallest Linear Drive Motor On The Market!

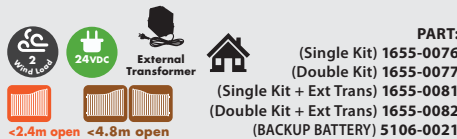

PART:
 (Single Kit) 1655-0076
 (Double Kit) 1655-0077
 (Single Kit + Ext Trans) 1655-0081
 (Double Kit + Ext Trans) 1655-0082
 (BACKUP BATTERY) 5106-0021

413 - Max. 200Kg @ 2m


- Integrated opening and closing mechanical stops
- Min. 140mm side-room
- Continuous duty cycle

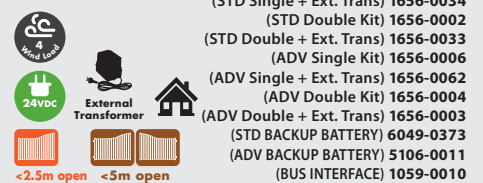

PART:
 (STD Single Kit) 1656-0005
 (STD Single + Ext. Trans) 1656-0034
 (STD Double Kit) 1656-0002
 (STD Double + Ext. Trans) 1656-0033
 (ADV Single Kit) 1656-0006
 (ADV Single + Ext. Trans) 1656-0062
 (ADV Double Kit) 1656-0004
 (ADV Double + Ext. Trans) 1656-0003
 (STD BACKUP BATTERY) 6049-0373
 (ADV BACKUP BATTERY) 5106-0011
 (BUS INTERFACE) 1059-0010

Mistral 324 - Max. 150Kg @ 2m

- Min. 100mm side-room
- Aluminium body, Stainless Steel tube
- Use BUS interface when connecting FAAC wireless photo beams

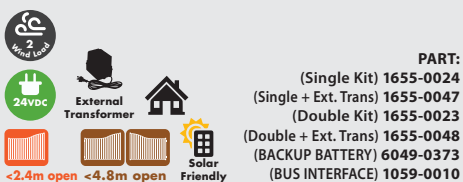

PART:
 (Single Kit) 1655-0024
 (Single + Ext. Trans) 1655-0047
 (Double Kit) 1655-0023
 (Double + Ext. Trans) 1655-0048
 (BACKUP BATTERY) 6049-0373
 (BUS INTERFACE) 1059-0010

415 [STANDARD] - ADV Max. 260Kg @ 2m

- Min. 110mm side-room
- 300mm Stroke
- Optional Encoder / Safecoder



Only 2 Motor Wires!

Ask About Limit Switches



PART:
 (STD Single Kit) 1656-0015
 (STD Single + Ext. Trans) 1656-0035
 (STD Double Kit) 1656-0007
 (STD Double + Ext. Trans) 1656-0016
 (ADV Single Kit) 1656-0021
 (ADV Single + Ext. Trans) 1656-0036
 (ADV Double Kit) 1656-0008
 (ADV Double + Ext. Trans) 1656-0039
 (STD BACKUP BATT.) 6049-0373
 (ADV BACKUP BATT.) 5106-0011
 (BUS INTERFACE) 1059-0010
 (SAFECODER) 6049-0340


415 [LONG] - ADV Max. 300Kg @ 2m

- Min. 110mm side-room
- 400mm Stroke
- Optional Encoder / Safecoder



Only 2 Motor Wires!

Ask About Limit Switches

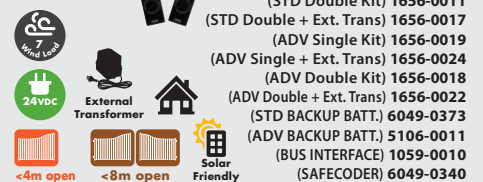

PART:
 (STD Single Kit) 1656-0014
 (STD Single + Ext. Trans) 1656-0020
 (STD Double Kit) 1656-0011
 (STD Double + Ext. Trans) 1656-0017
 (ADV Single Kit) 1656-0019
 (ADV Single + Ext. Trans) 1656-0024
 (ADV Double Kit) 1656-0018
 (ADV Double + Ext. Trans) 1656-0022
 (STD BACKUP BATT.) 6049-0373
 (ADV BACKUP BATT.) 5106-0011
 (BUS INTERFACE) 1059-0010
 (SAFECODER) 6049-0340

Please contact us and we will be happy to assist you and discuss your application

1300 366 046

global-access.com.au

RESIDENTIAL SWING GATE MOTORS - LINEAR (CONTINUED)



TWIST 200E - Max. 250Kg @ 2m

- 390mm Stroke - Min. 110mm Side-room
- No loss of power on ramp-up or ramp down
- Easy to use manual release
- Limit switches



OPTIONAL REAR MOUNT BRACKETS

PART: (50mm) 5825-0019 (100mm) 5825-0020

Only 2 Motor Wires!

PART: (Single Kit) 1656-0050 (Double Kit) 1656-0051 (Single Kit + Ext Trans) 1656-0056 (Double Kit + Ext Trans) 1656-0057

TWIST 200EL - Max. 250Kg @ 2m

- Long 550mm Stroke - Min. 110mm Side-room
- Strong, no loss of power on ramp-up or ramp down
- Good for 250mm pier-mount, OR outswing applications



OPTIONAL REAR MOUNT BRACKETS

PART: (50mm) 5825-0019 (100mm) 5825-0020

Only 2 Motor Wires!

PART: (Single Kit) 1656-0052 (Double Kit) 1656-0053 (Single Kit + Ext Trans) 1656-0058 (Double Kit + Ext Trans) 1656-0059

TWIST 350 - Max. 500Kg @ 2m

- 450mm Stroke - Min. 120mm Side-room
- No loss of power on ramp-up or down
- Easy to access/use manual release
- Extremely powerful motor
- Patented braking system



OPTIONAL REAR MOUNT BRACKETS

PART: (50mm) 5825-0019 (100mm) 5825-0020

OPTIONAL 12m MOTOR CABLE JOINER KIT

PART: 5825-0022

OPTIONAL TERMINAL PROGRAMMER

PART: 1018-0096



Suitable For Wind Loaded Gates!

5 Motor Wires!

[STD Control Box]: (Single Kit) 1656-0073 (Double Kit) 1656-0074 (Single Kit + Ext Trans) 1656-0060 (Double Kit + Ext Trans) 1656-0061
[LRG Control Box]: (Single Kit) 1656-0067 (Double Kit) 1656-0069 (Single Kit + Ext Trans) 1656-0068 (Double Kit + Ext Trans) 1656-0070

TWIST XL - Max. 800Kg @ 2m

- Suitable for rising gates (Max. 250Kg @ 2m on a 10% incline)
- Min. 200mm Side-room required, Max. 110° Opening
- Strong tubular operator with 450mm Stroke
- No loss of power on ramp-up or down
- **Massive 4,500N of power!**



OPTIONAL REAR MOUNT BRACKETS

PART: (50mm) 5825-0019 (100mm) 5825-0020

OPTIONAL 12m MOTOR CABLE JOINER KIT

PART: 5825-0022

OPTIONAL RISING HINGE CONNECTOR

PART: 1612-0001



5 Motor Wires!

Our Most Powerful Linear Motor Ever!

As strong as a Bear!
Perfect for heavy gates!

[LRG Control Box]: (Single Kit) 1656-0043 (Double Kit) 1656-0042 (Single Kit + Ext Trans) 1656-0071 (Double Kit + Ext Trans) 1656-0072

RESIDENTIAL UNDERGROUND SWING GATE MOTORS



770 [ADVANCED] - Max. 250Kg @ 2m

- Lever operated release with key
- Optional internal stops
- 140° & 180° kits available



PART: (Single Kit 100°) 1655-0016 | (Double Kit 100°) 1655-0015 (Int. Close Stop) 6049-0201 | (Int. Open Stop) 6049-0200 (BACKUP BATTERY) 5106-0011 | (S/Steel Foundation Box) 6049-0201

5800H [ADVANCED] - Max. 350Kg @ 2m

- Lever manual release (Opt. Hydraulic release)
- Integrated '2EASY' BUS absolute encoder & Positive Stops
- 100° or 180° opening kits



PART: (Single Kit 100°) 1656-0030 | (Double Kit 100°) 1656-0029 (Single Kit 180°) 1656-00320 | (Double Kit 180°) 1656-0031 (BACKUP BATTERY) 5106-0011 | (Hyd. Man. Release) 6049-0174

TWIST UG & UG+ - UG+ Max. 600Kg @ 3.5m

- Automatic learning, with intelligent motor force learning capabilities
- Optional battery back-up



105° Max. Opening

PART: UG - Max. 350Kg @ 3.5m | UG+ - Max. 600Kg @ 3.5m (UG Single Kit) 1655-0074 | (UG Double Kit) 1655-0075 (UG+ Single Kit) 1655-0084 | (UG+ Double Kit) 1655-0085 (BACKUP BATTERY) 5106-0020 | (12m Connecting Cable) 5825-0022

COMMERCIAL SWING GATE MOTOR



REX - Max. 1,500Kg @ 12m

- 100% Duty cycle
- Standard key for manual release, for remote operation
- Massive triple chain on drive system
- Mechanical brake for safe stop
- Internal mechanical stops



3 Year WARRANTY

Most Powerful Swing Gate Motor On The Market!

PART: (Single Kit) 1616-0014 (Double Kit) 1616-0015 (Radio Package - Receiver + Remotes) 1018-0133

GATE AND SWING-DOOR CLOSERS



DICTATOR DIREKT CLOSERS

- Help to force the leaf into the closed position reliably and securely!
- For leaves up to 1.5m width and/or Max. 100Kg in weight
- Adjustable closing speeds

PART: • 400N - 150mm Stroke, for leaves up to 80Kg or 1.2m wide; (Dark Grey) 1018-0127 (White) 1018-0053 • 400N - 200mm Stroke, for leaves up to 80Kg or 1.5m wide; (Black) 1018-0135 (Grey) 1018-0055 • 600N - 200mm Stroke, for leaves up to 100Kg or 1.5m wide; (Grey) 1018-0149 • Mount bracket for ascending / incline hinged leaves; 1018-0137



Please contact us and we will be happy to assist you and discuss your application

1300 366 046 global-access.com.au

BALL BEARING WINGED HINGE

- 200Kg a pair
- 88mm W



PART:
(LEFT) 1335-0017
(RIGHT) 1335-0018

BALL BEARING WINGED HINGE

- 200Kg a pair
- 102mm W



PART:
(LEFT) 1335-0019
(RIGHT) 1335-0020

HEAVY DUTY PRISON HINGE

- 650Kg a pair
- 115mm W



PART:
(LEFT) 1335-0021
(RIGHT) 1335-0022

BALL BEARING HINGE

- 650Kg a pair
- 300mm W



PART:
(LEFT) 1335-0031
(RIGHT) 1335-0032

RIISING HINGE


- Sold as a pair, top & bottom hinge



PART:
(LEFT) 1335-0033
(RIGHT) 1335-0034

HEIGHT ADJUSTABLE, UNIVERSAL LEFT/RIGHT OPENING WINGED HINGE

- 150Kg a pair - 135mm W - Sold as Singles



PART:
(GALVANISED) 1635-0013
(BLACK) 1335-0074

ADJUST. HINGE

- 60-90mm adjustment
- M20 bolt



PART:
1366-0005

ADJUST. HINGE

- From M16 to M27 bolt



PART:
(M16) 1366-0009
(M18) 1366-0010
(M20) 1366-0013
(M24) 1366-0016
(M27) 1366-0006

LONG HINGE

- From M20 to M24 bolt
- M20 = 100Kg a pair, M24 = 150Kg a pair



PART:
(M20) 1366-0012
(M24) 1366-0015

ADJUST. HINGE

- From M20 to M24 bolt
- M20 = 100Kg a pair, M24 = 150Kg a pair



PART:
(M20) 1366-0014
(M24) 1366-0017

ADJUST. HINGE

- M20 Bolt
- 100Kg a pair



PART:
1366-0011

ADJUST. HINGE

- From M20 to M24 bolt
- M20 = 100Kg a pair, M24 = 150Kg a pair



PART:
(M20) 1366-0018
(M24) 1366-0020

FRAME INSERT

- Forms part of the hinge set, please specify your frame size



PART:
(40mm Frame) 1366-0019
(50mm Frame) 1366-0021

ADJUSTABLE HINGE WITH PLATE

- 40mm TUBE = 300Kg a pair
- 50mm TUBE = 400Kg a pair



PART:
(40mm Tube) 1366-0022
(50mm Tube) 1366-0023

ADJUSTABLE INSERT GATE HINGE ON BALL

Choose from:

- 40mm
- 50mm insert
- Sold as top & bottom combination
- 150Kg a pair

PART:
(40mm) 1335-0003
(50mm) 1335-0004



BOTTOM BEARING HINGES WITH MECHANICAL STOP

- 80mm Ø = 400Kg a pair
- 100mm Ø = 1000Kg a pair



PART:
(80mm Ø) 1335-0028
(100mm Ø) 1335-0029

SAFETY CABLE FOR SWING GATES

- Prevents a gate leaf from falling in the event of hinge failure or collusion



PART:
(400mm LONG) 1366-0003
(600mm LONG) 1366-0004

HEAVY DUTY HINGE KIT

- This combines both the 27.415a & 27.415m
- 60Kg a pair



PART:
1335-0041

GIANT HINGE WITH BEARINGS

- Grease nipple
- 120Kg a pair
- 18mm Ø PIN



PART:
1335-0038

H-DUTY 2-WING BEARING HINGE

- Removable pin
- 80Kg a pair



PART:
1335-0035

H-DUTY 2-WING BEARING HINGE


- Removable pin
- 70Kg a pair



PART:
1335-0036

H-DUTY 3-WING BEARING HINGE

- Removable pin
- 120Kg a pair



PART:
1335-0037

BEARING HINGES

- 45mm Ø, 80mm L bracket
- 240Kg a pair



PART:
(Top Hinge) 1335-0047
(Bottom Hinge) 1335-0049

BEARING HINGES

- 50mm Ø, 110mm L bracket
- 500Kg a pair



PART:
(Top Hinge) 1335-0009
(Bottom Hinge) 1335-0010

BEARING HINGES

- 50mm Ø, 110mm L bracket
- 300Kg a pair



PART:
(Top Hinge) 1335-0048
(Bottom Hinge) 1335-0050

BEARING HINGES

- 50mm Ø, 100mm L bracket
- 500Kg a pair



PART:
(Top Hinge) 1335-0005
(Bottom Hinge) 1335-0006

ADJUSTABLE BEARING HINGES

- 50mm Ø, 55-70mm adjustment
- 300Kg a pair



PART:
(Top Hinge) 1335-0024
(Bottom Hinge) 1335-0026

ADJUSTABLE BEARING HINGES

- 70mm Ø, 52-77mm adjustment
- 500Kg a pair



PART:
(Top Hinge) 1335-0025
(Bottom Hinge) 1335-0027

BEARING HINGES

- 70mm Ø, 110mm L bracket
- 1,000Kg a pair



PART:
(Top Hinge) 1335-0007
(Bottom Hinge) 1335-0008

BEARING HINGES

- 70mm Ø, 112mm L bracket
- 1,000Kg a pair



PART:
(Top Hinge) 1335-0011
(Bottom Hinge) 1335-0012

BEARING HINGES

- 120mm Ø, 290mm L bracket
- 2,000Kg a pair




PART:
(Top Hinge) 1335-0044
(Bottom Hinge) 1335-0045

STAINLESS STEEL SWING GATE HARDWARE

50MM BEARING HINGES

- Top = 50mm Ø, 110mm L
- Bottom = 50mm Ø, 40mm H
- 500Kg a pair

PART:
(Top Hinge) 1335-0053
(Bottom Hinge) 1335-0054



70MM BEARING HINGES

- Top = 70mm Ø, 114mm L
- Bottom = 70mm Ø, 52.5mm H
- 1000Kg a pair

PART:
(Top Hinge) 1335-0055
(Bottom Hinge) 1335-0056

SWING GATE CENTRE GROUND STOPS + TRAVEL LIMITER



STAINLESS STEEL CENTRE GROUND STOP

162mm Ø x 36mm H

PART: 6049-0564



STOP WITH BOLT HOLE

90W x 143L x 57H

PART: 1365-0003



SURFACE MOUNTED STOP

100W x 120L x 45H

PART: 1365-0014



SURFACE MOUNTED STOP WITH FIXING PLATE

55mm H, lowest point

36mm from ground

PART: 1365-0006



ADJUSTABLE GATE TRAVEL LIMITER



PART: (Galvanised) 6049-0563
(Stainless) 6049-0565

SURFACE MOUNTED STOP

137W x 158L x 50H

PART: 1365-0013



IN-GROUND STOP

95W x 111L x 90H

PART: 1365-0002



CAST IRON STOPS

MED = 100W x 115L x 51H LGE = 120W x 143L x 56H

PART: (Medium) 1665-0001
(Large) 1365-0018



SLIDING GATE HARDWARE



20MM U STEEL GROUND TRACK

- High Quality, Galvanised Steel
- Available in four lengths; 2m, 3m, 4m + 5m



Don't Forget Pin Fixings!

PART: 1328-0002

PART: (2m) 1371-0004 (3m) 1371-0001 (4m) 1371-0002 (5m) 1371-0003

IN GROUND STEEL TRACK

- High Quality, Galvanised Steel
- Available in two lengths; 3m & 5.8m



Don't Forget Joining Pins!

PART: 1361-0020

PART: (3m) 1361-0021 (5.8m) 1361-0022

2 BEARING BOTTOM WHEELS IN CRADLE

- 90mm Ø 400Kg PART: 1361-0031
- 100mm Ø 500Kg PART: 1361-0032
- 120mm Ø 700Kg PART: 1361-0033
- 140mm Ø 900Kg PART: 1361-0034



(Weight rating is for 2 wheels)

1 BEARING BOTTOM WHEELS IN BRACKET

- 80mm Ø 300Kg PART: 1361-0027
- 90mm Ø 300Kg PART: 1361-0028
- 100mm Ø 400Kg PART: 1361-0029



(Weight rating is for 2 wheels)

2 BEARING BOTTOM WHEELS

- 80mm Ø 500Kg PART: 1361-0001
- 90mm Ø 500Kg PART: 1361-0002
- 100mm Ø 700Kg PART: 1361-0003
- 120mm Ø 900Kg PART: 1361-0004
- 140mm Ø 1000Kg PART: 1361-0005



160mm & 180mm Also Available
(Weight rating is for 2 wheels)

NYLON ROLLER

35mm Ø x 30mm

PART: 1357-0007



NYLON ROLLERS

25mm Ø up to 42mm Ø

PART:
(25mm Ø 35 H) 1357-0001
(32mm Ø 40 H) 1357-0002
(42mm Ø 40 H) 1357-0004
(42mm Ø 59 H) 1357-0003



NYLON ROLLER

42mm Ø x 51mm
With Rubber Rings

PART: 1357-0013



NYLON ROLLER WITH BRACKET

45mm Ø x 45mm

PART: 1557-0001



NYLON ROLLER WITH 2 BEARINGS

50mm Ø x 60mm

PART: 1357-0018



NYLON ROLLERS

41 mm Ø x 245mm

PART:
(No Bracket) 1357-0014
(With Bracket) 1357-0015



ADJUSTABLE NYLON ROLLER

45mm Ø

PART: 1357-0006



NYLON ROLLER

30mm Ø x 40 H

PART:
(30mm Ø x 40 H) 1357-0020
(40mm Ø x 56 H) 1357-0019



NYLON ROLLER

40mm Ø

PART:
(60mm H) 1557-0001
(100mm H) 1357-0002
(150mm H) 1357-0003



RUBBER ROLLER

50mm Ø

PART:
(75mm H) 1357-0008
(150mm H) 1357-0009



NYLON ROLLER WITH BRACKET

40mm Ø x 150mm

PART: 1357-0021



NYLON SLIDING BLOCK

- For incline gates
- Optional Alum. Guide Set: 2-piece set of 250mm L guides, suit 75mm post

PART:
(Block) 1357-0005 | (Guide Set) 1358-0004



ADJUSTABLE MEETING POINT

- 80-180mm Adj. ID
- 40mm Diam. Black Nylon Rollers

PART: 1361-0042



MEETING POINT (BAS70)

63mm ID

PART:
(ZINC) 1361-0011
(BLACK) 1361-0041

SIDE MOUNT BRACKET

← Suits BAS70

133mm Long
PART:
(ZINC) 1361-0013
(BLACK) 1361-0044



TOP ROLLER BRACKET

124mm Long

PART: 1361-0012



BRACKET TO SUIT SMALL TOP ROLLERS

195mm Long

PART:
(ZINC) 1361-0010
(BLACK) 1361-0040



GALVANISED STEEL GATE STOPS




- 123mm bolt down
- For over ground track

PART: 1365-0023



- Adjustable rubber stop
- 145mm H

PART: 1365-0009



- Simple bolt-down stop
- 80mm or 120mm H


PART: (80mm) 1365-0016
(120mm) 1365-0017



- Simple weld-on stop
- 112mm H

PART: 1365-0015

SCREW-IN RUBBER STOPS

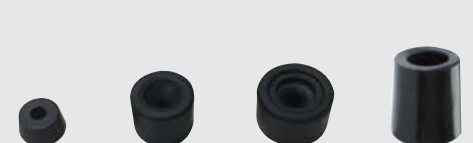

PART:
(24mm Ø x 12mm L) 1365-0010 | (32mm Ø x 23mm L) 1365-0011
(37mm Ø x 23mm L) 13665-0012 | (40mm Ø x 45mm L) 1365-0004

NYLON GATE RACK

- Nylon outer, steel insert
- Supplied in 1 meter lengths

Standard Rack

- 4 Lugs Down
- Up to 600kg
- Black

PART: 1053-0005

Standard Rack

- 6 Lugs Down
- Up to 700kg
- Black

PART: 1053-0006

Heavy Duty Rack

- 6 Lugs Down
- Up to 1000kg
- Grey

PART: 1053-0011

Heavy Duty Rack

- 6 Lugs Down
- Up to 1200kg
- Grey

PART: 1353-0002

Heavy Duty Rack

- 6 Lugs Up
- Up to 1000kg
- Grey

PART: 1053-0010



Steel Rack Also Available!
More Info On Our Website

Please contact us and we will be happy to assist you and discuss your application

1300 366 046 global-access.com.au


AUSTRALIA'S LARGEST RANGE OF CANTILEVER

S

<4m
OPENING
200Kg
MAX. WEIGHT
INCLUDES GUIDE RAIL
54mm GAP
UNDER GUIDE RAIL

8 WHEEL CARRIAGE

- 240 L x 121mm H
- Base: 150 x 124 x 6mm



PART:
1314-0030

SUPPORT WHEEL

- 57 W x 68mm H
- 62.5mm Ø Wheel



PART:
1314-0001

MEETING POINT


- 80 W x 95mm H



PART:
1314-0002

GUIDE RAIL

- 57 W x 67mm H
- 3mm Wall



PART:
(3 M - 14Kg) 1314-0031
(6 M - 28Kg) 1314-0032

M

<5m
OPENING
300Kg
MAX. WEIGHT
INCLUDES GUIDE RAIL
65mm GAP
UNDER GUIDE RAIL

8 WHEEL CARRIAGE

- 210 L x 125mm H
- Base: 170 x 110 x 10mm



PART:
1314-0003

POST MOUNT

- FOR MOUNTING ON
100mm SHS POSTS



PART:
1314-0007

SUPPORT WHEEL

- 60 W x 73.5mm H
- 68mm Ø Wheel



PART:
1314-0009

MEETING POINT

- 80 W x 72mm H



PART:
1314-0015

SUPPORT BRACKET

- FOR MEETING POINT
- 171 W x 150 H x 73mm D



PART:
1314-0017

GUIDE RAIL

- 60 W x 60mm H
- 3.5mm Wall



PART:
(3 M - 16Kg) 1314-0019
(6 M - 32Kg) 1314-0020

XM

<6m
OPENING
400Kg
MAX. WEIGHT
INCLUDES GUIDE RAIL
74mm GAP
UNDER GUIDE RAIL

9 WHEEL CARRIAGE

- 246 L x 142mm H
- Base: 180 x 150 x 10mm



PART:
1314-0042

POST MOUNT

- FOR MOUNTING ON
100mm SHS POSTS



PART:
1314-0055

SUPPORT WHEEL

- 68 W x 84mm H
- 68mm Ø Wheel



PART:
1314-0011

MEETING POINT

- 80 W x 72mm H



PART:
1314-0015

SUPPORT BRACKET

- FOR MEETING POINT
- 172 W x 150 H x 73mm D



PART:
1314-0043

GUIDE RAIL

- 68 W x 68mm H
- 3.5mm Wall



PART:
(3 M - 18Kg) 1314-0025
(6 M - 36Kg) 1314-0026

L

<8m
OPENING
500Kg
MAX. WEIGHT
INCLUDES GUIDE RAIL
82mm GAP
UNDER GUIDE RAIL

9 WHEEL CARRIAGE

- 391 L x 171mm H
- Base: 300 x 150 x 12mm



PART:
1377-0001

POST MOUNT

- FOR MOUNTING ON
100mm SHS POSTS



PART:
1314-0006

SUPPORT WHEEL

- 100 W x 113mm H
- 98mm Ø Wheel



PART:
1314-0008

MEETING POINT

- 120 W x 72mm H



PART:
1314-0012

SUPPORT BRACKET

- FOR MEETING POINT
- 215 W x 175 H x 82mm D



PART:
1314-0016

GUIDE RAIL

- 100 W x 89mm H
- 5mm Wall




PART:
(3 M GAL - 35Kg) 1314-0021
(6 M GAL - 70Kg) 1314-0022 | (5.8 M RAW) 1314-0036

XL

<12m
OPENING
1050Kg
MAX. WEIGHT
INCLUDES GUIDE RAIL
100mm GAP
UNDER GUIDE RAIL

9 WHEEL CARRIAGE

- 617 L x 240mm H
- Base: 500 x 200 x 15mm



PART:
1314-0044

SUPPORT WHEEL

- 140 W x 170mm H
- 128mm Ø Wheel



PART:
1314-0010

MEETING POINT


- 160 W x 72mm H



PART:
1314-0014

SUPPORT BRACKET

- FOR MEETING POINT
- 255 W x 220 H x 83mm D



PART:
1314-0018

GUIDE RAIL

- 140 W x 140mm H
- 6mm Wall



PART:
(3 M - 67Kg) 1314-0023
(6 M - 134Kg) 1314-0024

XXL

<25m
OPENING
3000Kg
MAX. WEIGHT
INCLUDES GUIDE RAIL
115mm GAP
UNDER GUIDE RAIL

16 WHEEL CARRIAGE

- 852 L x 284mm H
- Base: 560 x 240 x 20mm



PART:
1314-0039

SUPPORT WHEEL

- 184 W x 169mm H
- 117mm Ø Wheel



PART:
1314-0037

GUIDE RAIL (RAW)

- 184 W x 169mm H
- 12mm Wall



PART:
(5.5 M - 300Kg) 1314-0040

Please contact us and we will be happy to assist you and discuss your application


1300 366 046 global-access.com.au

CANTILEVER SLIDING GATE HARDWARE (CONTINUED)

NEED HELP TO DESIGN YOUR CANTILEVER GATE?

- Ask us for help to design and specify the correct size cantilever hardware and automation to suit your specific gate requirements
- It is important that the right tail length and construction methods are used to ensure the gate works efficiently and without future problems

- Eliminate ground movement issues!
- No need for ground track!
- Increase security!

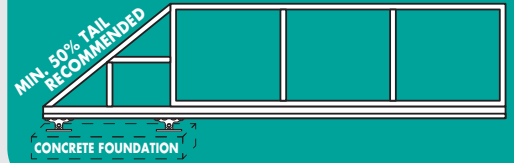


HANGING DOOR HARDWARE - GALVANIZED & STAINLESS STEEL



GALVANISED GUIDE RAIL


MEDIUM



3m 1332-0006
5.8m 1332-0007



LARGE




3m 1314-0031
5.8m 1314-0032



Stainless Steel Options

STAINLESS STEEL - MEDIUM




5.8m 1322-0002



GALVANISED FIXED 4-WHEEL STEEL TROLLEY

MEDIUM

450Kg per set




1377-0009



LARGE

750Kg per set




1377-0010



STAINLESS STEEL - MEDIUM

450Kg per set



1322-0001



GALVANISED MOUNTS (HANGERS), JOINERS + STOPS

CEILING GUIDE MOUNT



Medium 1332-0003
Large 1332-0002

WALL GUIDE MOUNT



Medium 1332-0005
Large 1332-0004

GUIDE JOINER



Medium 1332-0009
Large 1332-0008

INTERNAL STOPS



Medium 1365-0020
Large 1365-0019

Please contact us and we will be happy to assist you and discuss your application

1300 366 046 global-access.com.au

ELECTRIC DOOR STRIKES, GATE LOCKS & DROP BOLTS

ELECTRIC DOOR STRIKE GEM

- 12/24V DC
- 35mm Keeper Width
- 15mm Latch Throw



PART: 1345-0003

ELECTRIC DOOR STRIKE FES10

- 12/24V DC
- IP56 Weather Resistant



PART: 1045-0005

ELECTRIC DOOR STRIKE FES20

- 12/24V DC
- IP56 Weather Resistant



PART: 1045-0006

STANDARD ELECTRIC DOOR STRIKE

- 12V AC



PART: 1345-0002

LONG ELECTRIC DOOR STRIKE

- 12V AC




PART: 1345-0001

12V VIRO ELECTRIC LOCK KIT

- Electric pulse lock
- Barrel and 2 keys
- Strike plate included
- 12V AC



PART: 1018-0013

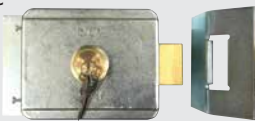

PART: 1045-0012

24V TWIST ELECTRIC LOCK KIT

- Barrel & 3 keys
- Side & face strikes
- 24V DC



PART: 1045-0032

MECHANICAL SHOOT BOLT - BLOCKIT

- For use with double-leaf swing gates
- Mechanical 'Shoot Bolt'
- 20mm of throw



PART: 1309-0003

MECHANICAL LOCKING BOLT

- For use with double-leaf swing gates
- Stainless Steel construction
- 30mm of throw



PART: 1309-0004

MAGNETIC GATE LOCK - 600LB & 1200LB

- Weatherproof Stainless Steel Housing, Zinc Plated Armature Plate
- 12/24V DC (Selectable)
- Holding Force: 600Lb (272Kg) 1200Lb (54Kg)
- Current Draw: 500mA/12V DC @ 20°C 250mA/24V DC @ 20°C



PART: (600LB) 1045-0003

PART: (1200LB) 1045-0002



12V, 2AMP POWER SUPPLY

- 12V DC - 2Amp regulated, short circuit protected power supply with N/O & N/C relays



PART: 1072-0006

L&Z BRACKETS TO SUIT MAGLOCKS

- 5mm Countersunk Holes



PART: (600LB) 5712-0002 (1200LB) 1012-0002

ELECTRIC DROP BOLT LOCK

- 20mmØ steel bolt, with 50mm throw
- Choose Vertical OR Horizontal mount version
- 24V DC



PART: (VERTICAL) 1045-0013 (HORIZONTAL) 1045-0015

24V, 6AMP POWER SUPPLY

- 24V DC, 6Amp regulated, short circuit protected power supply with N/O & N/C relays
- Purpose built for use with our electric drop bolts
- Built in Relay



PART: 1072-0007

MOTORISED LOCKING BOLT

Austrian made Heavy Duty electric, worm-driven lock, with 125mm stroke and Ø23mm bolt.

- Suitable for vertical + Horizontal installation
- Euro-key manual release (including 3 keys)
- Speeds; 2.5 second drop, 2 second retraction
- Automatic obstacle reversing



PART: (Single Kit) 1045-0030 (Double Kit) 1045-0031

CABLE PROTECTORS

- Protect your lock cables




PART: (Plastic 300mm) 1045-0011 (Silver/Grey Metal 400mm) 1013-0015 (Dark Brown Metal 400mm) 1013-0016

Please contact us and we will be happy to assist you and discuss your application

1300 366 046 global-access.com.au

palgate

Low-Cost Access Control Solutions

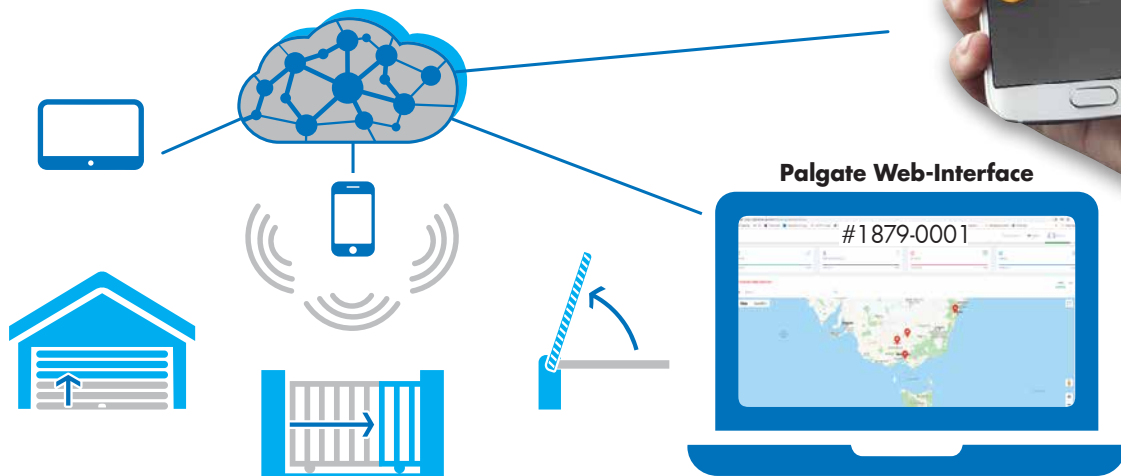

Palgate App-Interface
Free Download

Use your smartphone to Trigger + Control access to a wide range of devices, with the FREE Palgate smartphone app! It's a complete commercial solution!

BLUETOOTH MODELS	4G RANGE - Up to 12,000 users			REDUCER MODULE
 <p>Bluetooth Palgate #1818-0006 (Up to 20 Users) #1818-0007 (Up to 100 Users) #1818-0008 (Unlimited Users)</p>	 <p>2 Relay, transmitter capable #1818-0014</p>	 <p>1 Relay, 1 Input, transmitter capable #1818-0015</p>	 <p>1 Output + 1 Input + Wiegand Input, Transmitter Capable #1818-0020</p>	<p>AC/DC POWER REDUCER</p> <ul style="list-style-type: none"> • 12V -24V 2A • Protect low-voltage accessories from high-voltage output and voltage spikes  <p>#1018-0013</p>
	OPTIONAL	TRANSMITTERS		

LONG RANGE RFID SCANNER

Easiest way to enter!




- Vehicle Tag
- Access Card

- 15m Tag Range, 7m card range
- Durable construction
- Low cost RFID solution
- Fully Managed access via web portal

#1852-0004

WIRELESS LOOP DETECTOR

Easiest way to exit!



- Wireless Loop
- Bolt Down
- 5-7yr battery life
- Up to 15m range from Palgate
- Manage access via web portal
- Optional transmitters are available

MUST USE A PALGATE 4G GSM TRANSMITTER CAPABLE PALGATE UNIT WITH THIS DEVICE!

#1818-0005

Please contact us and we will be happy to assist you and discuss your application


1300 366 046 global-access.com.au

SAFETY BEAMS

12/24V AC/DC SAFETY BEAMS & BUS INTERFACE [IP54]

- Wireless version includes 1 x CR2 3V battery
- 180° Beam rotation
- N.C. Output

PART:
(20m WIRED) 1059-0024
(8m WIRELESS) 1059-0011
(20m BUS) 1059-0005



PART:
(BUS INTERFACE) 1059-0010



12/24V AC/DC ARMAS PHOTO BEAMS - COMPACT [IP55]

- Offers 180° of Horizontal and 30° of Vertical adjustment
- Robust heavy duty applications, double rubber seal
- Wireless version includes 4 x AAA batteries

PART:
(8m PLASTIC WIRELESS) 1059-0050
(20m PLASTIC WIRELESS) 1059-0052
(20m ANTI-VANDAL WIRED) 1059-0032
(12m ANTI-VANDAL WIRELESS) 1059-0033



12/24V AC/DC ARMAS SLIMLINE PHOTO BEAMS [IP55]

- Choose Anti-vandal metal case or plastic case option
- 90° or 180° beam angle (not pivoting, no fine adjustment!)
- Ultra-slim, 32mm wide
- Up to 10m Range

PART:
(10m ANTI-VANDAL WIRED) 1059-0031
(10m PLASTIC WIRED) 1059-0048



12/24V AC/DC ARMAS PHOTO BEAMS - LARGE [IP55]

- Offers 180° of Horizontal and 30° Vertical adjustment
- Double pre-hole for cable input

PART:
(15m WIRED) 1059-0034
(40m WIRED) 1059-0035



GARAGE DOOR ARTICULATING PHOTO BEAM KIT

Created to increase the safety of automation such as garage tilt & roller doors.

**Must be used with the Bungee Cable (Sold Separately).

- Up to 10m Max. detection range
- 12 or 24V AC/DC
- IP54

PART:
(PHOTO BEAM KIT) 1059-0040 | (BUNGEE CORD) 1013-0020

EXAMPLE VIDEO



SAFETY SENSORS

BEA LZR CURTAIN SENSORS

- Vertical & Horizontal Versions [IP65]

Please refer to the part descriptions below for model and sensor curtain dimensions.



PART:
(RS305) 1059-0056



PART:
(OTHERS) 1059-0021



PART:

(LZR RS305 - 5m x 5m Vertical) 1059-0049

(LZR I100 - 9m x 9m Vertical) 5159-0004
(LZR H100 - 9m x 9m Horizontal) 5159-0005
(LZR S25 - 25m x 25m Vertical) 1059-0019

BEA FLAT SCAN 170 KIT

The FLATSCAN gives 170 measurement points to provide complete safety for swing doors.

- Covers entire swing and hinge pinch points

Programming Remote



PART: 1059-0022

PART: (Sold as a pair) 5159-0007



BEA LZR WIDESCAN

Offers 3 Functions:

- Open Doors
- Provide Surveillance Detection
- Safety Sensor
- 7 Tilt laser curtains



PART: 1059-0028

BEA SPARROW MOTION SENSOR

An all-round motion sensor, offering reliable opening for people and vehicles.

- 2m Minimum mounting height
- 240° angle of inclination
- IP64



PART: 1059-0023

BEA CONDOR MOTION SENSOR

Offers activation and area monitoring in one single product, and is part of the latest generation of sensor offering optimal opening and the highest protection level.



PART: 1059-0016

BEA EAGLE - ONE & 5+ [Black]

A unidirectional detection sensors

- EAGLE One - for all types of doors
- EAGLE 5+ for Emergency Exit doors



PART:
[ONE] 5159-0002 | [5+] 5159-0003

IXIO-DT1 SENSOR

For use on automatic sliding doors to detect both Motion and Presence.

- Plug, push & go installation
- Mounting Height: 2m to 3.5m



PART: 6049-0319

BEA 4SAFE MOTION SENSOR [350mm]

For use on swing and revolving door leaves, offering safety to the users by avoiding contacts with the doors in motion.



PART: (4SAFE SENSOR) 5159-0006 | (RAIN COVER) 1059-0017

BEA SMART FOCUS SENSOR

Provides safety where narrow fields of detection are needed, suits these applications:

- Sliding Door during the open cycle
- Curved sliding or Swing door during the closing cycle



PART: 1059-0020

Please contact us and we will be happy to assist you and discuss your application

1300 366 046 global-access.com.au

POPULAR ACCESSORIES

HARDWIRED KEYPADS

METAL KEYPAD - TERMINAL BLOCK

- Anti-Vandal
- Gel Filled
- Back lit



PART: 1038-0008

METAL KEYPAD - 2M CABLE

- Anti-Vandal
- Gel Filled
- Back lit



PART: 1038-0009

METAL KEYPAD - WIEGAND

- Anti-Vandal
- Gel Filled
- Back lit

KPKX1 RFID KEYPAD

- Backlit Function; ON, OFF, Auto-Off
- 12-28V AC/DC



PART: 1038-0005

FAAC XKP BUS KEYPAD

- Suits the FAAC range of gate motors



PART: 1038-0007

WIRELESS KEYPADS

GLOBAL WIRELESS KEYPAD 100M RANGE

- Requires a Global Access Mini receiver



FAAC XKP WIRELESS KEYPAD

- SLH: Rolling code, self-learning
- Powered by 2 x 3V CR2450 batteries



PART: 1038-0014

TOUSEK TORCODY WIRELESS KEYPAD

- Black plastic body
- Rolling code
- Powered by 1 x 9V alkaline battery



PART: 1038-0013

SOMMER TELECODY+ WIRELESS KEYPAD

- Water resistant
- Long life battery
- Powered by 1 x 3V CR123A battery



PART: 1018-0124

CABLE

CABLE 24/.2 F8 GREY / BLACK


- Suits Push Buttons



PART: 1013-0003

CABLE 4 CORE

- Security for wiring 12/24v Accessories



PART: 1013-0006

CABLE 0.5mm²

- Shielded for use with S800 & S450 Encoders



PART: 1013-0008

CABLE 1.84mm² TWIN SHEATH

- Suits motors



PART: 1013-0005

CABLE 2.9mm² TWIN SHEATH

- Suits Ext. Transformers
- MAX. 40m run



PART: 1013-0004

CABLE 6mm² F8

- Suits Ext. Transformers
- MAX. 100m run



PART: 5113-0007

PUSH BUTTONS

PUSH BUTTONS

- Flush Button
PART: (22mm BLACK) 1018-0010 (19mm SILVER) 5167-0003
- Two Position Key Switch
PART: 5167-0005
- 22mm Mushroom Button
PART: (GREEN) 1018-0011 (RED) 1018-0012



PUSH BUTTON ENCLOSURES

- PART: (1 HOLE) 1024-0006 (2 HOLE) 1024-0007



HARD WIRED BUTTON ENCLOSURES

- PART: (BUTTON ONLY) 1018-0004 (LOCKABLE) 1018-0005



WIRELESS PUSH BUTTON ENCLOSURES

- PART: (FAAC SLH REMOTE) 1018-0009 (FAAC RC REMOTE) 1018-0008 (GLOBAL REMOTE) 1018-0085 (SOMMER REMOTE) 1018-0151 (GENIUS ECHO REMOTE) 5118-0004 (LOCKABLE FAAC SLH REMOTE) 1018-0007 (LOCKABLE FAAC RC REMOTE) 1018-0006



ANTENNAS

433MHz HIGH POWERED AERIAL

- Suits Control Boards
- 433Mhz



PART: 6049-0326

2.4GHz - 5dB ANTENNA

- 125mm long



PART: 1003-0001

2.4GHz - 11dB ANTENNA

- 360mm long



PART: 1003-0002

3G/4G - 5dB RANGE BOOSTING ANTENNA

- 850-2100MHz



PART: 1003-0003

3G/4G - 7dB RANGE BOOSTING ANTENNA

- 850-2100MHz



PART: 1003-0004

TRIGGERS & TIMERS

OMGATE BLUETOOTH ACCESS MODULE

- Up to 10 users FREE, charges apply for more users



PART: 1018-0032

4G TRIGGER MODULE

- Current draw; 50mA
- 12/24V



PART: 1018-0080

24HR, 7 DAY TIMER

- Fully programmable
- Choose 12V or 24V model



PART: (12V) 1044-0007 (24V) 1044-0008

12/24V DIGITAL 365 DAY TIMER

- Fully programmable
- DIN Rail mountable
- 12/24V AC/DC
- 2 Channels



PART: 1018-0129

REDUCER MODULE

AC/DC REDUCER MODULE

- 24-12V 2A
- Protect low-voltage accessories from high-voltage output and voltage spikes



PART: 1018-0013

Please contact us and we will be happy to assist you and discuss your application

1300 366 046 global-access.com.au

GATE, GARAGE & AUTOMATIC DOORS - REMOTES & RECEIVERS

TOUSEK 2 & 4 BUTTON ROLLING CODE (RC) REMOTES

• 433 MHz

2 CHANNEL ROLLING CODE (RC) RECEIVER

- 433 MHz

PART: (2 CH - RC) 1018-0120

TORCODY WIRELESS KEYPAD

- Black plastic body
- Rolling code

PART: 1038-0013

2 CHANNEL ADD-ON ROLLING CODE (RC) RECEIVER

- 433MHz

PART: (2 CH - ADD-ON) 1018-0121

SOMMER 2 & 4 BUTTON REMOTES

• 922.5 MHz

2 CHANNEL RECEIVER

- 922.5 MHz

PART: (2 CH) 1018-0094

TELECODY+ WIRELESS KEYPAD

- Water resistant
- Long life battery

PART: 1018-0124

4 CHANNEL RECEIVER

- 922.5 MHz

PART: (4 CH) 1018-0095

GLOBAL 2 & 4 BUTTON ENCRYPTED ROLLING CODE (RC) REMOTES

- Range 150m Max.
 - Red LED indicator / light
 - Battery saving feature
- PART: (2 BUTTON) 1018-0084
(4 BUTTON) 1018-0085
-

GLOBAL 3 BUTTON DIP SWITCH REMOTE

- Micro dip-switch code
 - 1,024 selectable (possible) codes
 - Up to 100m MAX. range
 - Key-Ring capable
 - Wall mountable
- PART: 1018-0078
-

GLOBAL 2 CHANNEL RECEIVER

- 433.920 MHz
 - 1,000 Code memory
 - 12/24V AC/DC
 - Small In Size
- PART: 1018-0083
-

GLOBAL WIRELESS KEYPAD RECEIVER

- Vandal resistant
 - 433.920 MHz
 - Requires Global Mister mini Receiver (1018-0083)
- PART: 1038-0010
-

FAAC XKP WIRELESS KEYPAD

- SLH: Rolling code, self-learning
- PART: 1038-0014
-

FAAC 1 CHANNEL PLUG-IN RECEIVER CARD RP (SLH)

- 433 MHz
- PART: (5-PIN CABLE) 1013-0002
(RECEIVER CARD) 6049-0336
-

FAAC XT2 SLH 2 OR 4 BUTTON REMOTES

- Premium gloss black finish
 - 433 MHz
-

FAAC 2 OR 4 CHANNEL ADD-ON RECEIVER

- Convert your garage door to use these remotes
 - 2nd Channel for latching
- PART: (2 CHANNEL) 6049-0334
(4 CHANNEL) 6049-0335
-

GENIUS 4 BUTTON ECHO REMOTE

- Premium gloss black finish
 - 433MHz
- PART: 6049-0429
-

GENIUS BRAVO 1 CHANNEL RECEIVER CARD (ADD-ON RECEIVER)

- Suits Echo remotes only
 - 433MHz
- PART: 6049-0427
- 5-PIN STRIPPED RECEIVER HARNESS**
- Required to connect to the motor control board
- PART: 1013-0002
-

FAAC 2 CHANNEL PLUG-IN RECEIVER

- Allows pedestrian mode to be used
 - 433 MHz
- PART: 6049-0324
-

GENIUS 2 CHANNEL RECEIVER

- 433 MHz
- PART: 6049-0428
-

VENUS ROLLING CODE 2 BUTTON REMOTE

- Suit HERMES 200 | 250 Swing Gate Motors
 - Suit HERCULES Sliding Gate Motors
 - Black finish
 - 433 MHz
-

ADD-ON RECEIVER

- Suits Venus remotes only
 - 433 MHz
- PART: 5118-0034
-

FAAC ROLLING CODE (RC) 4 BUTTON REMOTE

- Premium gloss grey finish
 - Replaced the old white RC remotes
 - 433 MHz
- PART: 1018-0073 - GREY
-

FAAC 1 CHANNEL PLUG-IN RECEIVER CARD RC

- 433MHz
- PART: (5-PIN CABLE) 1013-0002
(RECEIVER CARD) 6049-0479
-

Please contact us and we will be happy to assist you and discuss your application

1300 366 046 global-access.com.au

POPULAR ACCESSORIES

LOOP DETECTORS

VEHICLE DETECTOR EXIT PUCK

- When buried, the 'Puck' is hidden and vandal proof
- Covers 3m (Max.) wide driveways
- AC/DC voltage capable
- Works with any operator

PART: 1018-0126



VEHICLE DETECTOR PRASTEL

- 24V AC/DC
- Single Channel
- Digital Display
- DIN Rain Mountable
- 2-Button Programming

PART: 1018-0075



VEHICLE DETECTOR - PREFORMED LOOP 6 & 10m

- PVC coating
- Includes 15m Cable
- 6 & 10 metre variants available

PART:
(6m) 1013-0018
(10m) 1013-0019



WIRELESS VEHICLE DETECTOR PUCK

- Makes for easy installation
- Replaceable batteries last 1-3 years
- Receiver is AC/DC voltage capable
- Works with any operator

PART: 1018-0140



LOOP DETECTOR CABLE

- Per/m (100m on a roll)
- 7/0.50

PART: 1013-0007



MATRIX VEHICLE DETECTOR

- Single Channel and dual channel available
- 12/24V
- An Induction Loop Controller, that detects the presence of vehicles and metallic objects

PART:
(1 CH) 1018-0034
(2 CH) 1018-0035



LED FLASHING LIGHTS & TRAFFIC LIGHTS

12/24V LED FLASHING LIGHT

- 12/24V (3.2A @12V) | IP67
- 18 x 3W LED (Suitable for daytime use)
- SAE J845, class 1 rated output

PART: 1044-0013



24V XLED FLASHING LIGHT

- The light has 40 LED lights to ensure it is seen both day and night!
- For use with 24V systems | IP54

PART: 1044-0002



TRAFFIC LIGHTS




- IP66
- Red & Green
- Multi-voltage, 24V to 230V
- 141mm Ø lens - 28 LED, 70 Lux

PART: 1044-0016



- IP66
- Alternating Red & Green
- 24V AC/DC - 125 mA per light
- 120mm Ø lens - 25 LED, 50 Lux

PART: 1044-0005



- 24V Traffic Light Control Board, with power supply in enclosure

PART: 1044-0010



- IP66
- Red, Amber & Green
- 24V AC/DC - 125 mA per light
- 120mm Ø lens - 25 LED, 50 Lux

PART: 1044-0004

FIXED BOLLARDS & ACCESS CONTROL STANDS

FIXED BOLLARDS

- Powder coated safety yellow
- Bolt down with end cap
- 1.2m tall, choose; 90mm or 140mm Ø



PART:
(90mm Ø) 1008-0001
(140mm Ø) 1008-0002



ACCESS CONTROL STANDS

- Bolt down or concrete in
- Single or Double keypad faces
- Powder coated safety yellow
- 75mm SHS Pipe Construction

PART:

A (Single Face; 250mm W x 150mm H, 1.8m H - Concrete In Only) 1001-0002


B (Double Face; 250mm W x 150mm H, 2.21m H - Concrete In Only) 1001-0003

C (Single Face; 125mm W x 150mm H, 1.2m H - Bolt Down Only) 1001-0004

(Single Face; 250mm W x 150mm H, 1.2m H - Bolt Down Only) 1001-0005

D (Double Face; 125mm W x 150mm H, 2.21m H - Bolt Down Only) 1001-0006

(Double Face; 250mm W x 150mm H, 2.21m H - Bolt Down Only) 1001-0007

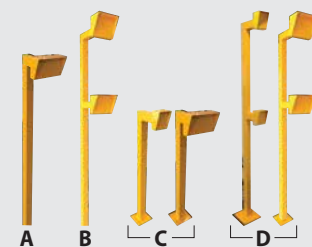

COMMERCIAL TECHNICAL SPRAYS

This pack of 6 Technical Sprays allows you to:
Weld, Seal, Lubricate, Protect & Slide

Everything you need to install & service gates!

- INOX
- Silicone
- Zinc
- Anti-Spatter
- Grease
- Anti-Seize

AVAILABLE AS INDIVIDUAL CANS




PART: 1031-0009

PEDESTRIAN GATE & DOOR CLOSERS

Fantastic for aluminium shopfront doors!


- Aluminium Finish
- Adjustable spring tension



PART:
(20Kg Aluminium) 1018-0155

Fantastic for large commercial and industrial doors, even residential external doors or gates!

- Galvanised OR Stainless Steel
- 4 Models; 20Kg, 40K & 60Kg
- Adjustable spring tension



PART:
(20Kg Galvanised) 1018-0158
(40Kg Galvanised) 1018-0157
(60Kg Galvanised) 1018-0156
(40Kg Stainless Steel) 1018-0159

Please contact us and we will be happy to assist you and discuss your application

1300 366 046 global-access.com.au

POWER OPTIONS FOR GATE MOTORS

24V EXTERNAL TRANSFORMERS

- Low voltage cable run, easy, and safe!
- Suitable for runs up to 100 meters with the correct cable
- The easy solution when your power point (GPO) is not close to your gate
- Are an off the shelf part, pre-made for your convenience
- Rated for outdoor use, and made to work with mains fuse
- Simply run the correct size low-voltage wire from the internal connector to your motor
- Order with your motor of choice as a 'package'



Popular External Transformer Motor Kits

PART:
(C720) 1555-0004



PART:
(C721) 1555-0005



PART:
(PULL T24 - Z20) 1556-0008



PART:
(MISTRAL 324 - SINGLE) 1655-0024
(MISTRAL 324 - DOUBLE) 1655-0023



PART:
(TWIST 200EL - SINGLE) 1656-0052
(TWIST 200EL - DOUBLE) 1656-0053



PART:
(TWIST XL - SINGLE) 1656-0065
(TWIST XL - DOUBLE) 1656-0066



24V LONG-RANGE LOW VOLTAGE

(Max. 140kg @ 1.5m | Max. 2.4m)




For use when Solar isn't an option

→ Up to 500m Max. →



- A Long-Range Low Voltage is the ultimate solution, it provides an external transformer to operate the gate automation as well as charging the battery backup pack at the gate, with a range of up to 500 meters depending on the cable diameter selected
- For use when you want a reliable, permanent power solution without any of the restrictions solar has
- Perfect for when you want 8+ hours of battery back-up, a benefit of having a 25Ah battery solution
- For use where there is too much tree coverage (shade) making solar an ineffective solution
- 2.9mm cable suitable for runs up to 300m, 6mm cable recommended for 300m plus runs

PART:
(Low Voltage Kit) 1051-0006 | (2.9mm Cable - p/metre) 1013-0004

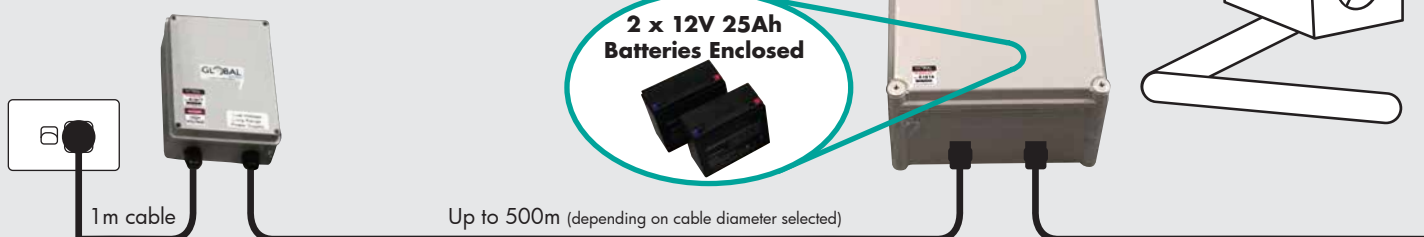


ENQUIRE FOR PRICING

Please contact us and we will be happy to assist you and discuss your application

1300 366 046 global-access.com.au

POWER OPTIONS FOR GATE MOTORS


24V PROFESSIONAL SOLAR KITS



60W Pack

OPTIONAL SOLAR PANEL MOUNT
PART: 1062-0002


PART:
(60w 9Ah) 1062-0015

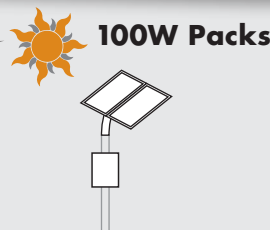

100W Packs

OPTIONAL SOLAR PANEL MOUNT
PART: 1062-0003

PART:
(120w 9Ah) 1062-0010
(120w 15Ah) 1062-0008
(120w 25Ah) 1062-0009

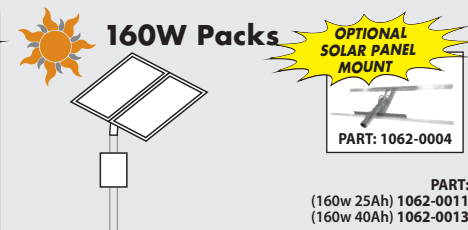

160W Packs

OPTIONAL SOLAR PANEL MOUNT
PART: 1062-0004

PART:
(160w 25Ah) 1062-0011
(160w 40Ah) 1062-0013


- Global Access offer a range of Professional Solar Kits that utilise only the best components available to ensure a quality product is produced
- Designed for 'Clear Sky' use only, from sun-up to sun-down!
- Solar solutions are not suitable for use where trees obscure the sun at any point during the day

- Please discuss with us your requirements and we can assist you with the correct selection of your ideal solar kit as it is important to match the solar kit to your control board and accessory requirements
- Solar panels are to be positioned facing North
- We can produce custom solar kits to suit any application!

ENQUIRE FOR PRICING

SOLAR PANELS & CHARGE REGULATOR

- **12V 60W Panel**
> 670mm x 580mm x 30mm
- **12V 65W Panel**
> 780mm x 670mm x 35mm
- **18V 80W Panel**
> 700mm x 670mm x 30mm
- **24V 50W Panel**
> 670mm x 580mm x 35mm

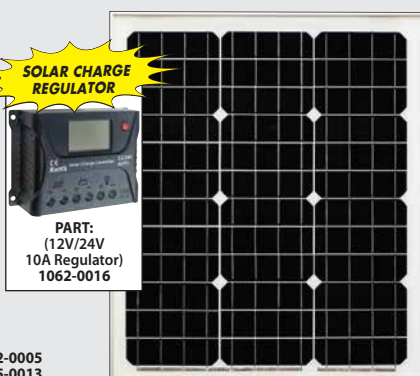

ENQUIRE FOR PRICING

PART:
(12V 60W) 1062-0019 (18V 80W) 1062-0005
(12V 65W) 1062-0020 (24V 50W) 5825-0013

12V RECHARGEABLE SEALED BATTERIES

- Deep cycle - sustainable power over a long period of time
- Multi-purpose - solar kits, low-voltage kits
- No-spill, sealed enclosure
- Premium quality



24V UPS BACKUP SYSTEMS


- Used when a basic battery backup is not enough
- A 24V Backup System is suitable for most 24V control boards and offers additional peace of mind when it comes to a redundancy power solution
- Able to provide up-to 24 hours of standby time in the event of a power outage from the main power supply (mains or solar)
- Ventilation for airflow & battery longevity
- Fuse protector on batteries
- 2 x AGM deep cycle high quality batteries
- 5 Stage Charger



PART:
(24V 7Ah) 1074-0013 (24V 25Ah) 1074-0010 (24V 40Ah) 1074-0011

230V UPS BACKUP SYSTEMS

- Made for commercial applications
- 230V motors plug straight into the backup system
- Standby time of 24+ hours in the event of a mains power outage
- To be positioned out of direct sunlight, preferably indoors
- 4 stage intelligent charger increases battery life
- 100Ah OR 190Ah 3000W output kits available

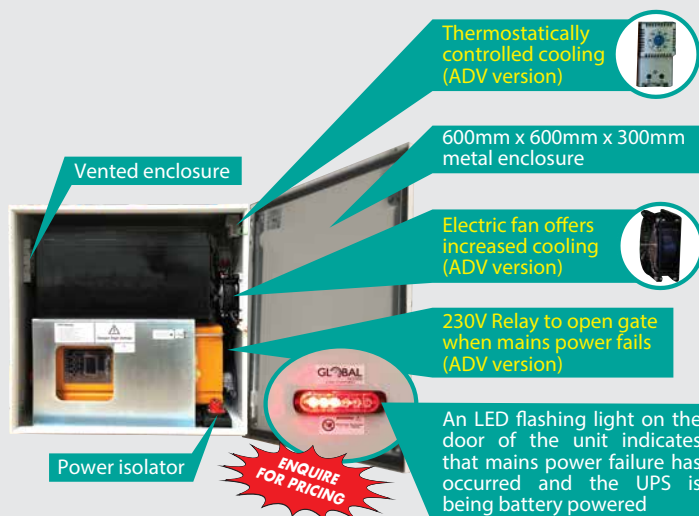

PART:
STANDARD - INDOOR USE ONLY ADVANCED - INDOOR/OUTDOOR USE
(230V 100Ah) 1074-0016 ADV (230V 100Ah) 1074-0007
(230V 190Ah) 1074-0017 ADV (230V 100Ah) 1074-0012

Please contact us and we will be happy to assist you and discuss your application

1300 366 046 global-access.com.au

12V CHAIN BARRIER + 24V BOOM GATES / BARRIERS



LIFT X2



Features:

- 20 cycles/day
- Dimensions - 120x120x1000mm
- Maximum closing width 10m
- Motor Pillar made of Powder Coated Aluminium
- 5-7 seconds to raise and lower
- Automatic Stop System

Optional Accessories:

- Counter barrier for chain mounting



PART:
(6m) 1149-0014
(10m) 1149-0015
(Receiving Pillar) 1149-0011
(Mounting Base) 1112-0004



ASB SERIES

Features:

- Easy to install, modern design
- Choose a LEFT or RIGHT opening
- Choose 6m RECTANGLE or 5.5m ROUND profile beam of which can be easily shortened to 1.5m
- Durable Aluminium housing
- Integrated warning light
- Automatic opening for anti-crushing
- Max. 2W standby power consumption

Technical Data ASB

Motor	24V
Power	80 Watt
Opening Times	>7 Seconds
Duty Cycles	Max. 350 cycles p/day
Boom Length	5.5m OR 6m (can be shortened)



PART:

(6m RIGHT, RECTANGLE Beam) 1110-0042
(6m LEFT, RECTANGLE Beam) 1110-0043
(5.5m RIGHT, ROUND Beam) 1110-0066
(5.5m LEFT, ROUND Beam) 1110-0067



B614 SERIES

Features:

- Easy to install, modern design
- Setup as LEFT or RIGHT opening
- Opens in less than 2 secs (3m boom)
- Programming via buttons & display
- Inbuilt encoder for anti-crushing

Technical Data B614

Motor	24V
Power	165 Watt
Opening Times	>2 Seconds
Frequency of use	100%
Boom Length	3-5m Standard



PART:

(3m Opening) 1110-0026
(4m Opening) 1110-0027
(5m Opening) 1110-0028



B680 SERIES

Features:

- Hybrid technology, core of the B680 Barrier, combines the advantages of a 24v DC Motor with Hydraulic technology
- The 24v Motor allows a continuous duty, making this barrier suitable for high traffic applications such as car parks and toll ways
- The hydraulic technology and the use of high quality components make the B680 a very reliable and durable barrier
- Suitable for beams up to a maximum of 8m

Technical Data

	Small	Large
Motor	24V Hydraulic	24V Hydraulic
Power	240 Watt	240 Watt
Opening Times	>2 Seconds	<6 Seconds
Frequency of use	100%	100%
Boom Length	2.3-5.3m Standard	5.3-8.3m Standard



PART:

(3m S) 1110-0004
(4m S) 1110-0005, (5m S) 1110-0006
(5m L) 1110-0007, (6m L) 1110-0008
(7m L) 1110-0009, (8m L) 1110-0010



PASS 838ST SERIES


Features:

- Premium materials and construction
- Strong steel housing
- 100% Duty Cycle
- Choose a Left or Right opening unit, with 3 lengths - 3, 4.5, or 6 metres



Technical Data 838L

Motor	230V
Opening Times	>7 seconds
Frequency of use	100%
Boom Length	3-6m Standard

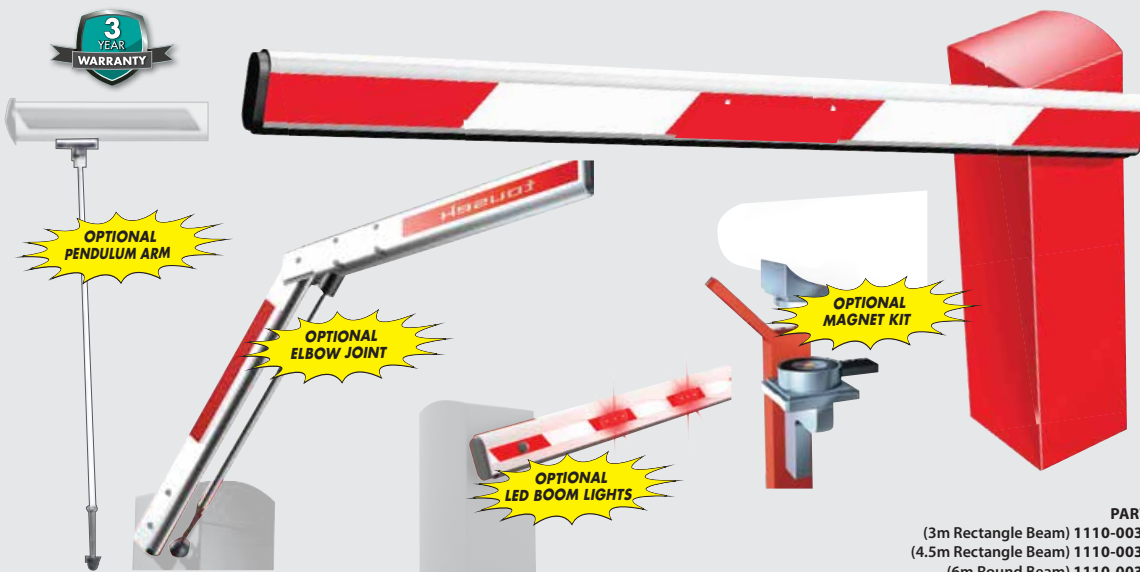

PART:

(3m Rectangle Beam) 1110-0035
(4.5m Rectangle Beam) 1110-0037
(6m Round Beam) 1110-0039



Please contact us and we will be happy to assist you and discuss your application

1300 366 046 global-access.com.au

AUTOMATIC RISING BOLLARDS



J275 RISING BOLLARD

Features:

- 600 or 800mm rise - 7mm thick steel cylinder
- Heavy Duty Bollard
- Fully integrated hydraulic technology
- Built-in emergency release in case of power failure
- One control board can operate up to 4 bollards

Cylinder Stroke: 600mm or 800mm Option

Cylinder Diameter: 275mm

Cylinder Head Material: Aluminium

Environment Temperature: -15°C to +55°C



ENQUIRE FOR PRICING

PART:
(600mm Rise) 1108-0002
(Painted 800mm Rise) 1108-0003
(Stainless Steel 800mm Rise) 1716-0002

J355 M30 + M50 RISING BOLLARDS

Features:

- M30 has a 1m cylinder, M50 has a 1.2m cylinder
- Painted or Stainless Steel cylinders available
- Fully integrated hydraulic technology
- Built-in emergency release in case of power failure
- Available with emergency fast operation (EFO)

Cylinder Stroke: M30 - 1m or M50 - 1.2m

Cylinder Diameter: 355mm

Cylinder Head Material: Aluminium

Environment Temperature: -15°C to +55°C



ENQUIRE FOR PRICING

PART:
(M30 Painted Rise) 1716-0003
(M30 Stainless Steel Rise) 1108-0007
(M50 Painted Rise) 1716-0005
(M50 Stainless Steel Rise) 1716-0007

AUTOMATIC SWING DOOR SYSTEMS



A951 [24v] Swing Door Opener

The A951 has an inbuilt anti-crushing safety device for both opening and closing functions.

The motor is capable of manual operation in case of a power failure.



OPTIONAL BACKUP BATTERY



PART: 1006-0006

PART:
(A951 Operator with Artic. Arm) 1220-0011
(Articulated Arm Only) 1220-0010
(Sliding Arm Only) 1220-0009

ENQUIRE FOR PRICING

950N2 [24v] Swing Door Opener

The 950N2 Automatic Door Opener is fire rated, and meets Australian Standard AS 1530.4:2014

The motor is capable of manual operation in case of a power failure.



AUST. FIRE DOOR RATED



PART:
(A950N2 Operator With Artic. Arm) 1218-0004
(A950N2 Operator With Sliding Arm) 1218-0005
(Articulated Arm Only) 6049-0299
(Sliding Arm Only) 6049-0300
(80mm Extension Shaft) 6049-0484

ENQUIRE FOR PRICING

310 HD [230v] Swing Door Openers

• 310 Swing Door Operator - Sliding Arm [Max. 300Kg @ 1.5m] - 200Nm

• 310 XXL Swing Door Operator - Sliding Arm [Max. 600Kg @ 2.5m] - 700Nm



UP TO 600KG @ 2.5M WIDE



ENQUIRE FOR PRICING

AUTOMATIC SLIDING DOOR SYSTEMS



A1400 AIR PEDESTRIAN SLIDING DOOR AUTOMATION RANGE

The A1400 perfectly optimises door opening and closing times, to limit energy loss within the building. This is done to limit the consumption of energy of the air-conditioning and heating systems creating economic savings and a reduction in polluting emissions.

Compliant with EN16005 European Standard.

- Power Supply: 230V Vac
- Absorbed Power: 100W
- Drive Unit: 24Vdc motor with encoder
- Opening Leaf Speed: Adjustable 5 to 80cm/sec
- Closing Leaf Speed: Adjustable 5 to 70cm/sec
- Free Passage Width: 700mm to 3000mm
- Max Leaf Weight: 200kg
- Options:
 - Dual motor unit for heavier leaves
 - Redundant motor for escape routes
 - Teleopic operator

ENQUIRE FOR PRICING



PERFECT FOR RETRO-FITTING



Please contact us and we will be happy to assist you and discuss your application

1300 366 046

global-access.com.au

TOUCHLESS SOLUTIONS

CONTACTLESS EXIT BUTTONS

- ILLUMINATES BLUE IN STANDBY MODE AND GREEN WHEN TRIGGERED



- Brushed 304 Stainless Steel Faceplate
- High sensitivity sensor for fast detection
- 5-8cm sensing distance



- Infrared induction technology
- Dual LED indicator: Blue when in standby, Green when triggered
- Output contacts: NO/NC/COM
- PC plastic enclosure for high temperature and corrosion resistance
- Easy to install
- Long lifespan
- Max. 12/24V DC

PART:
(40mm WIDE) 1059-0054
(50mm WIDE) 1059-0055



BEA MAGIC SWITCH NON-CONTACT OPENING SENSORS [IP54 OR IP65]



- Adjustable detection range from 10m to 60cm @ 90°
- Potentiometer to adjust detection field size
- Recessed mount (not surface mount)
- DIP-Switches for output mode, color logic and audio alert (CHROMA ADV only)
- Fine-tuning via remote control (CHROMA ADV only)
- IP54 = Indoor Use Only | P65 = Indoor OR Outdoor Use
- **Magic Switch:**
 - > Blue LED, IP54, Toggle Function
- **Magic Switch CHROMA STD (Standard):**
 - > BIOMASTER Antimicrobial Protection, Multicolour LED, IP65, Toggle Function
- **Magic Switch CHROMA ADV (Advanced):**
 - > BIOMASTER Antimicrobial Protection, Multicolour LED, IP65, Toggle Function, Audio Signal, External Signal Input, Remote Control Settings

PART:
[IP54 Magic Switch] 1059-0015
[IP65 Magic Switch CHROMA STD] 1059-0053
[IP65 Magic Switch CHROMA ADV] 1059-0058



KPKX1 KEYPAD - RFID CARD & FOB CAPABLE



- KEYPAD for single door, multi-function
- RFID CARD, individually coded for increased security
- FOB, individually coded for increased security

PART:
(KEYPAD) 1038-0005
(RFID CARD) 5123-0109
(FOB) 6049-0387

4G TRIGGER MODULE - TRIGGER FROM AROUND THE WORLD



- To be used with TELSTRA sims only (not included)
- Up to 200 users
- No call charges

PART:
1018-0080

VEHICLE DETECTOR PUCK - WIRELESS [WIRED VERSION AVAILABLE]



- Easy installation
- Replaceable batteries last 1-3 years
- Receiver is AC/DC voltage capable
- Works with any operator

PART:
1018-0140

ANTI-VANDAL PHOTO BEAMS WIRELESS & WIRED [WITH NO RELAY]



- A: Wireless - up to 12m
- B: Wired - up to 10m
- C: Wired - 15m or 40m

PART:
(A: WIRELESS) 1059-0033
(B: SLIM HARD WIRED) 1059-0031
(C: 15m LARGE HARD WIRED) 1059-0034
(C: 40m LARGE HARD WIRED) 1059-0035

SMART FOCUS [OPEN, PROTECT OR MONITOR]



- Provides safety where narrow fields of detection are needed
- Safeguards potential impact or 'pinch zones'
- Opens, protects or monitors

PART:
1059-0020

IXIO-DT1 SENSOR [FOR AUTOMATIC SLIDING DOORS]



- Detection: Motion and Presence
- Radar + Infrared technology
- Plug, push & go installation
- Mounting Height: 2m to 3.5m (local regulations may differ)

PART:
6049-0319



Visit our showroom

34a Access Way, Carrum Downs, VIC 3201

Call us on **1300 366 046**

